

23382 IDO 4,5W T SMD E14-WW

LED light source


5905339233820













Kanlux IDO are candle-shaped sources with a E14 screw. These LED sources are characterised by large illumination angle (230°) and their decorative shape.

GENERAL DATA:

Colour: white

Lamp designed for decorative lighting: Not applicable

Compatible with a dimmer: no

Height [mm]: 129 Diameter [mm]: 38 Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50/60 Lamp-power factor: 0.4 Rated power [W]: 4.5

Material: plastic Light source: C37 Diode type: LED SMD

Total rated luminous flux [lm]: 400 Colour temperature: Warm white Colour temperature [K]: 3000 Colour uniformity [SDCM]: ≤6 Colour-rendering index Ra: ≥80

Cap: E14

Rated lamp-service life [h]: 20000 Number of on/off cycles: ≥15000 Rated beam angle [°]: 230

Rated light level [°]: 230 Light source EEI: A+

Lamp rated current [mA]: 37

Annual power consumption [kWh/1000h]: 5 Luminous efficiency of the lamp [lm/W]: 89

Ignition time [s]: ≤ 0.5

Lamp-heating time to 60% of the full luminous flux [s]:

Negligible

Lamp-heating time to 95% [s]: <2

Lamp premature-failure indicator: <5% po 1000h Lamp service life factor after the period of 6000h [%]:

≥90

Luminous flux retention factor at the end of rated

service life [%]: ≥70

Luminous flux retention factor after the period of 6000h


[%]: ≥80





23382 IDO 4,5W T SMD E14-WW

LED light source





Declaration of equality in power rating [W]: 35

Light source shape: swieczka

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 10


Number of units in the secondary packaging: 10

Number of units in the packaging: 100

Net unit weight [g]: 36 Grammage [g]: 53.1

Length of a unit pack [cm]: 4
Width of a unit pack [cm]: 4
Height of a unit pack [cm]: 14.5
Weight of a cardboard box [kg]: 5.31
Width of a cardboard box [cm]: 21.5
Height of a cardboard box [cm]: 32
Length of a cardboard box [cm]: 42

Volume of a cardboard box [m³]: 0.028896

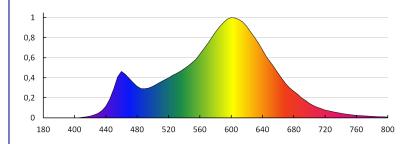

KANLUX S.A. (kat 23382) IDO 4,5W T SMD E14-WW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 23382) IDO 4,5W T SMD E14-VW Lampy: 1 x IDO 4,5W T SMD E14-VW

