


25560 LITEN LED 6W-WW

Downlight fitting

5905339255600



Kanlux LITEN LED downlights with integrated LED light source are designed for mounting in suspended ceilings. All Kanlux LITEN LED ceiling luminaires have a built-in power supply enabling connection of the luminaires to an 230V AC grid.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Height [mm]: 39

Diameter [mm]: 109

Assembly hole [mm]: Ø87

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 6

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 390

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80

Service life [h]: 20000

Number of on/off cycles: ≥25000

Lighting angle [°]: 110

Luminous efficiency of the lamp [lm/W]: 65

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: plastic

Connection type: Bolt terminal block

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5


IP class: 40/20

Downlight fitting



LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 100
Number of units in the secondary packaging: 1
Number of units in the packaging: 100
Net unit weight [g]: 94
Grammage [g]: 139.3
Length of a unit pack [cm]: 11
Width of a unit pack [cm]: 4.5
Height of a unit pack [cm]: 11.5
Weight of a cardboard box [kg]: 13.93
Width of a cardboard box [cm]: 53
Height of a cardboard box [cm]: 26.5
Length of a cardboard box [cm]: 60
Volume of a cardboard box [m³]: 0.08427

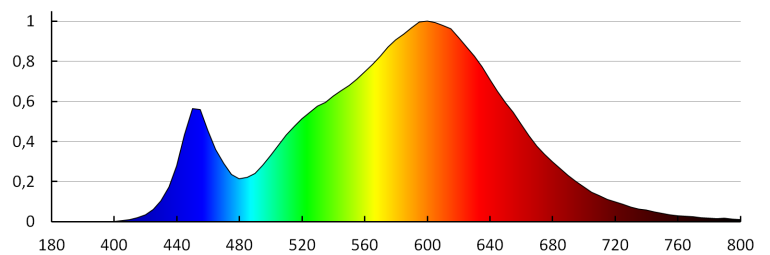

KANLUX S.A. (kat 25560) LITEN LED 6W-WW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25560) LITEN LED 6W-WW
Lampy: 1 x LITEN LED 6W-WW

