


## 25561 LITEN LED 6W-NW

Downlight fitting

5905339255617



Kanlux LITEN LED downlights with integrated LED light source are designed for mounting in suspended ceilings. All Kanlux LITEN LED ceiling luminaires have a built-in power supply enabling connection of the luminaires to an 230V AC grid.

### GENERAL DATA:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**The product is not suitable to be covered with a heat-insulating material:** yes

**Height [mm]:** 39

**Diameter [mm]:** 109

**Assembly hole [mm]:** Ø87

**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 6

**Class of protection against electric shock:** II

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 390

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:** ≤6

**Colour rendering index:** 80

**Service life [h]:** 20000

**Number of on/off cycles:** ≥25000

**Lighting angle [°]:** 110

**Luminous efficiency of the lamp [lm/W]:** 65

**Ambient temperature range to which the product can be exposed:** 5÷25

**Enclosure material:** plastic

**Connection type:** Bolt terminal block

**Lamp-heating time [s]:** ≤1

**Lamp-ignition time [s]:** ≤0,5


**IP class:** 40/20

### Downlight fitting



#### LOGISTIC DATA:

**Unit of measurement:** unit  
**Packaging method:** 100  
**Number of units in the secondary packaging:** 1  
**Number of units in the packaging:** 100  
**Net unit weight [g]:** 94  
**Grammage [g]:** 139.3  
**Length of a unit pack [cm]:** 11  
**Width of a unit pack [cm]:** 4.5  
**Height of a unit pack [cm]:** 11.5  
**Weight of a cardboard box [kg]:** 13.93  
**Width of a cardboard box [cm]:** 53  
**Height of a cardboard box [cm]:** 26.5  
**Length of a cardboard box [cm]:** 60  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.08427

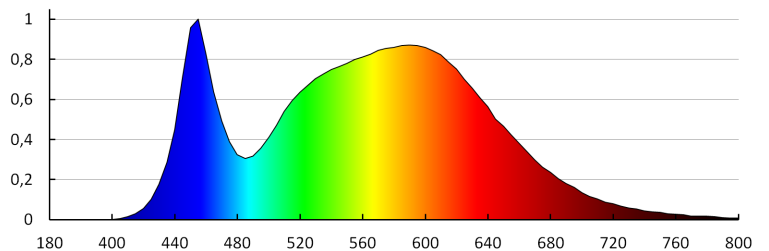

KANLUX S.A. (kat 25560) LITEN LED 6W-WW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25560) LITEN LED 6W-WW  
Lampy: 1 x LITEN LED 6W-WW

