


29250 FORRO LED EL 8W-GR

Facade luminaire

5905339292506



Kanlux FORRO are facade fittings characterized by simple and attractive design. They can be used as a fitting for interiors (they have an appropriate CRI coefficient), at the same time they can be used on building facades (IP54). In Kanlux FORRO light is directed towards facade, creating a light rim around the holder.

GENERAL DATA:

Colour: graphite

Place of assembly: wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: no

Height [mm]: 40

Diameter [mm]: 135

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Power factor: 0.5

Maximum power [W]: 8

Class of protection against electric shock: I

Diode type: LED SMD

Luminous flux [lm]: 330

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Service life [h]: 25000

Number of on/off cycles: ≥ 25000

Luminous efficiency of the lamp [lm/W]: 41

Ambient temperature range to which the product can be exposed: $-15 \div 40$

Enclosure material: aluminum alloy

Protective glass material: plastic

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: $1,5 \div 2,5$


Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

IP class: 54

29250 FORRO LED EL 8W-GR

Facade luminaire



LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 420

Grammage [g]: 507.5

Length of a unit pack [cm]: 14.5

Width of a unit pack [cm]: 14.5

Height of a unit pack [cm]: 6


Weight of a cardboard box [kg]: 10.15

Width of a cardboard box [cm]: 31.5

Height of a cardboard box [cm]: 32

Length of a cardboard box [cm]: 31.5

Volume of a cardboard box [m³]: 0.031752

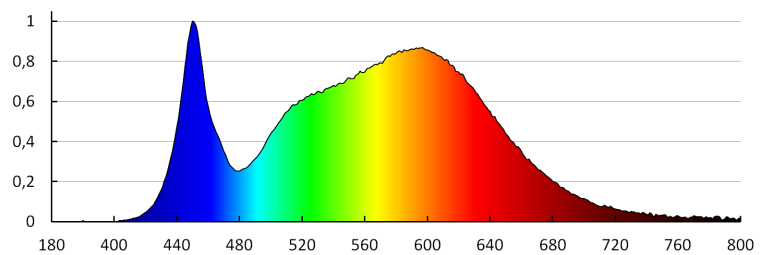

29250 FORRO LED EL 8W-GR

Facade luminaire

