


33183 BLINGO T 38W 6060 NW

Recessed-mounted LED panel

5905339331830

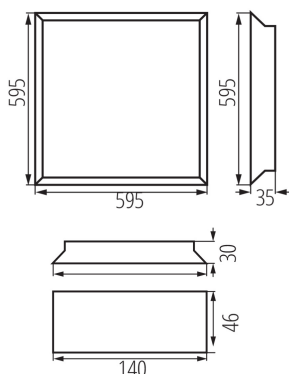

In Kanlux BLINGO panels, the LED modules are located on the rear panel wall and light directly downwards. These are backlit panels equipped with lenses that extend the angle of light emission, ensuring the uniformity of illumination. Elimination of the light-conducting plate greatly reduces the possibility of the luminaire yellowing and allows for better light parameters. We also provide a whole range of accessories for Kanlux BLINGO panels.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer : no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 35

Integrated LED light source : yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Power factor: 0.95

Maximum power [W]: 38

Class of protection against electric shock : II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 5400

Useful luminous flux of the light source Φ_{use} [lm] : 5900

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses : ≤ 6

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life : L70B50

Number of on/off cycles : ≥ 30000

Lighting angle [°]: 120

33183 BLINGO T 38W 6060 NW

Recessed-mounted LED panel




ACCESSORIES	index	BLINGO LED				
		BLINGO P 38W 6060 NW	BLINGO R 38W 12030 NW	BLINGO R 38W 6060 NW	BLINGO RU 38W 6060 NW	BLINGO TU 48W 6060 NW
		33180	29823	29822	29824	29825
ADTR-H 6060 B	29845	✓		✓	✓	
ADTR-H 6060 SR	29844	✓		✓	✓	
ADTR-H 6060 W	29843	✓		✓	✓	
ADTR-H 12030 B	33391		✓			
ADTR-H 12030 SR	33392		✓			
ADTR-H 12030 W	33390		✓			
ADTR-H 76MM 6060 B (on individual order only)	33396					✓
ADTR-H 76MM 6060 SR (on individual order only)	33397					✓
ADTR-H 76MM 6060 W (on individual order only)	33398					✓
CLIPS BLINGO RT	29826	✓	✓	✓	✓	✓
SPN BRAVO S/P 60-62	28504	✓	✓	✓	✓	✓

Luminous efficiency of the lamp [lm/W]: 142
Ambient temperature range to which the product can be exposed: 5÷25
Enclosure material: steel
Panel/frame material: steel
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1-2,5
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 20

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging: 1
Number of units in the packaging: 5
Net unit weight [g]: 1620
Grammage [g]: 2278
Length of a unit pack [cm]: 61.5
Width of a unit pack [cm]: 4.5
Height of a unit pack [cm]: 67.5
Weight of a cardboard box [kg]: 11.39
Width of a cardboard box [cm]: 20.5
Height of a cardboard box [cm]: 67.5
Length of a cardboard box [cm]: 63
Volume of a cardboard box [m³]: 0.087176

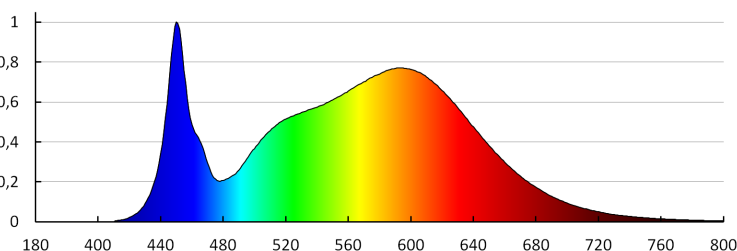


33183 BLINGO T 38W 6060 NW

Recessed-mounted LED panel

KANLUX S.A. (kat 33183) BLINGO T 38W 6060 NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33183) BLINGO T 38W 6060 NW
Lamps: 1 x BLINGO T 38W 6060 NW

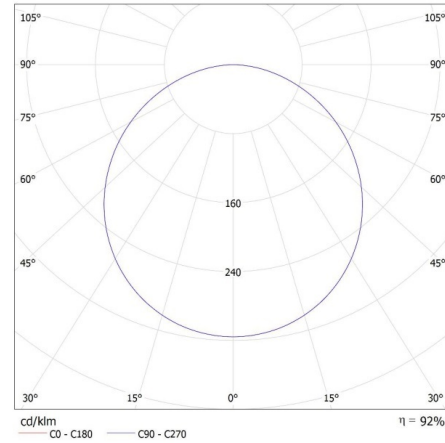

ACCESSORIES

28515

BLINGO DALI SET 38W

Set containing accessories and a power supply unit enabling communication in line with DALI protocol (28515)

