


Kanlux

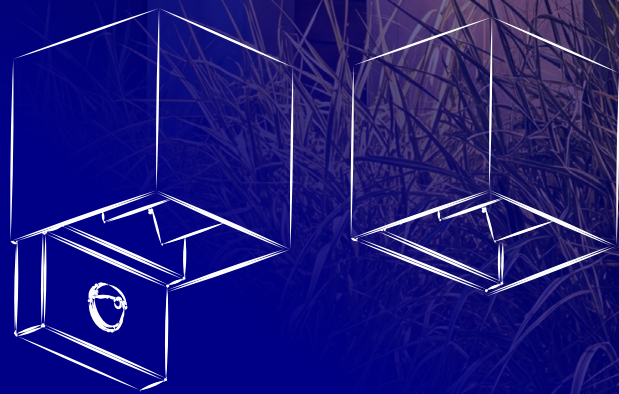

Facade Lighting
Range
Kanlux REKA

Kanlux

Kanlux **REKA CCT**

Kanlux REKA CCT - thanks to the CCT selectable function, users can choose from three colour temperatures: 3000K, 4000K or 6500K.



**IP
54**



CCT
Selection
Switch

3000K

4000K

6500K




Kanlux

Kanlux **REKA PIR**

Kanlux REKA PIR this is a new version of the well-established REKA luminaire range, offering enhanced functionality. It is ideal for applications where the luminaire does not need to remain illuminated continuously, or where it is only required to switch on automatically in low-light



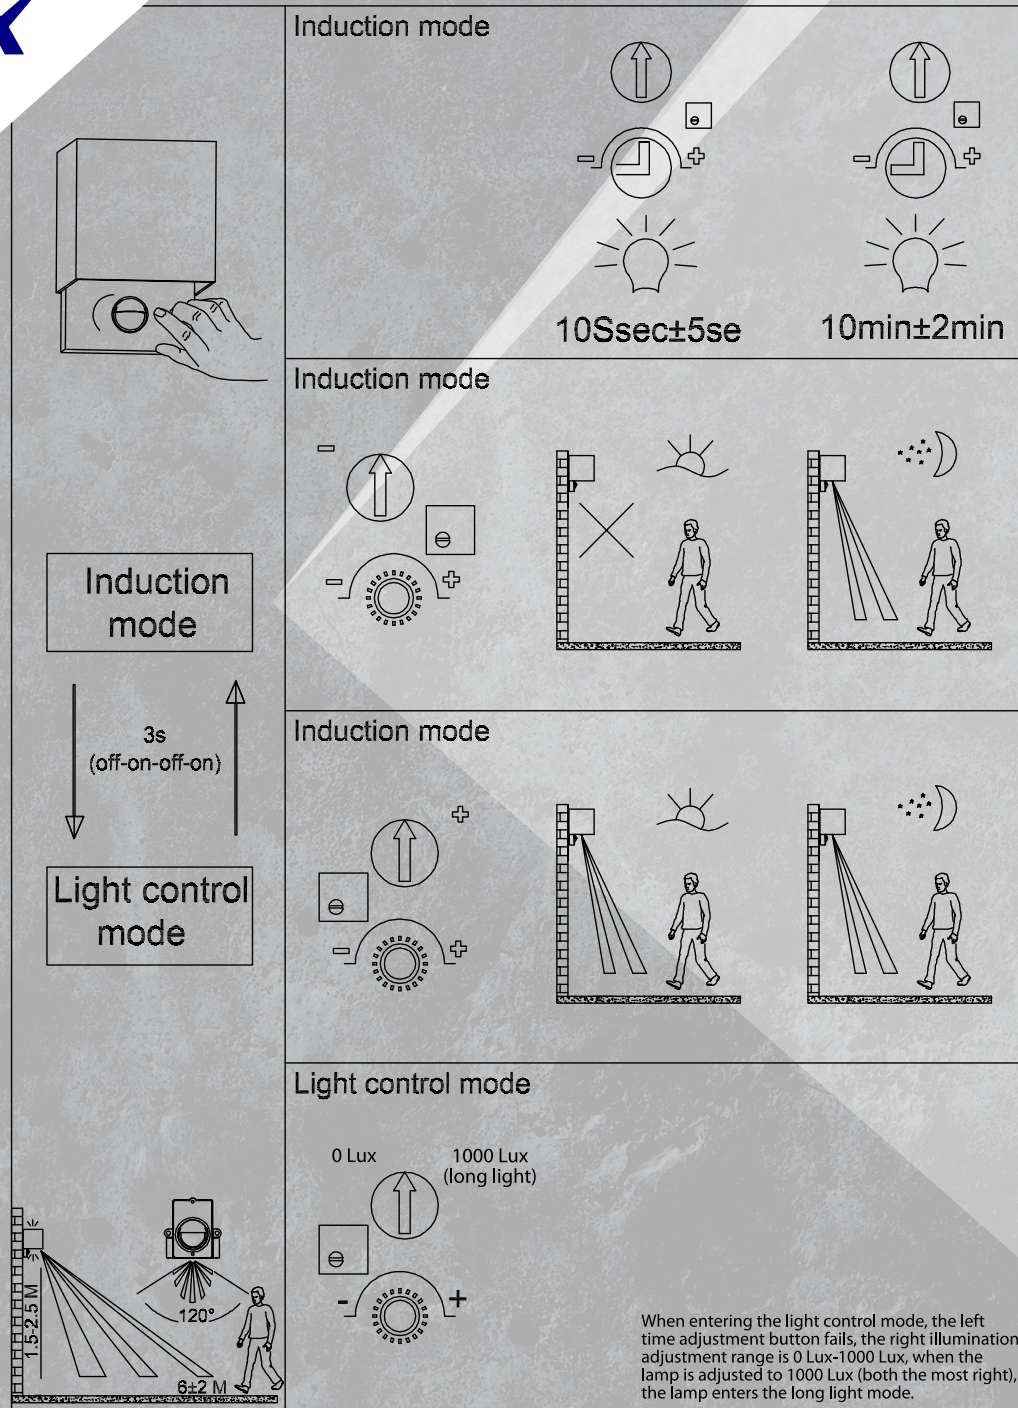

Kanlux **REKA PIR**

Two Sensor Functions

The standard sensor function allows the operating time after motion detection to be adjusted from 10 seconds to 10 minutes, as well as the ambient light threshold up to 1000 lux.

Dusk sensor mode: the luminaire switches on when the ambient light level falls below the preset lux level and switches off when the ambient light level rises above the selected lux threshold.

**MOTION
SENSOR
SETTINGS**



Kanlux

Kanlux REKA

Perfect for a variety of spaces.



Kanlux

Kanlux **REKA CCT**

NEW

Technical information:



REKA CCT EL
7W-L-GRL

29005

7W

280/320/300 3000/4000/6500



Technical Data :

Power supply: 220–240V~; 50Hz

Electrical protection class: Class I

Luminaire lifetime: 30,000 h


Switching cycles: ≥20,000

Housing material: aluminium

Diffuser material: tempered glass



REKA CCT EL 7W-L-GR

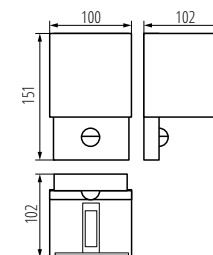

REKA CCT EL 7W-L-GR



* 5-year warranty under the terms of the warranty statement available on the website

Kanlux

Kanlux **REKA PIR**

Technical information:

					
REKA PIR EL 7W-L-GR	28994	7W	340lm	4000K	
REKA PIR EL 7W-O-GR	28995	7W	340lm	4000K	

Technical Data :

Power supply: 220–240V~; 50Hz

Electrical protection class: Class I

Luminaire lifetime: 30,000 h

Switching cycles: ≥20,000

Housing material: aluminium


Diffuser material: tempered glass




REKA PIR EL 7W-L-GR



REKA PIR EL 7W-O-GR



REKA PIR EL 7W-L-GR



REKA PIR EL 7W-O-GR

* 5-year warranty under the terms of the warranty statement available on the website



Technical information:

					
REKA LED EL 7W-L-GR	28990	7W	360lm	4000K	
REKA LED EL 7W-O-GR	28991	7W	380lm	4000K	
REKA LED EL 7W-L-W	28992	7W	500lm	4000K	
REKA LED EL 7W-O-W	28993	7W	510lm	4000K	

Technical Data

Power supply: 220–240V~; 50Hz

Electrical protection class: Class I

Luminaire lifetime: 30,000 h

Switching cycles: ≥20,000

Housing material: aluminium


Diffuser material: tempered glass




REKA LED EL 7W-L-GR



REKA LED EL 7W-O-W



REKA LED EL 7W-L



REKA LED EL 7W-O



* 5-year warranty under the terms of the warranty statement available on the website.

Kanlux



well
packed

kanlux.com