


Kanlux



**RING FOR SPOTLIGHT
FITTINGS
Kanlux ARET**

Kanlux

Kanlux ARET
is available in **three**
colours and **three**
shapes.

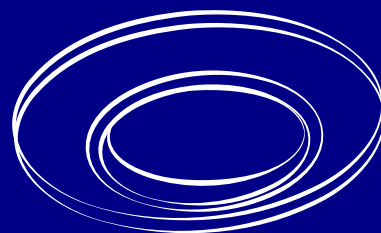

- DTO




white



black



black and white

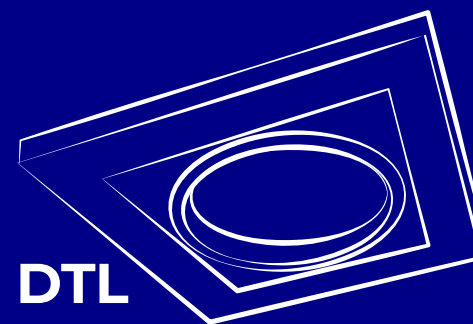

- DTL




white



black



black and white

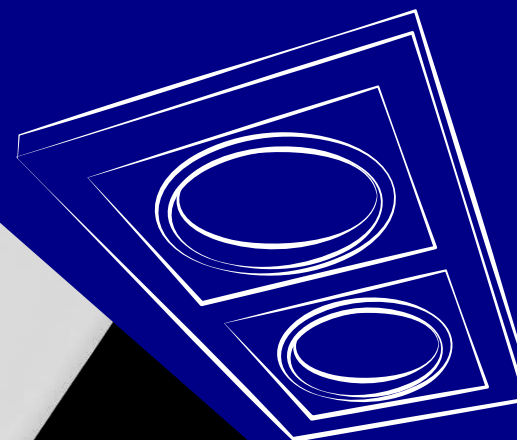

- 2 x DTL



white



black



black and white

adjustment
20°

Kanlux

Kanlux ARET
is available in **three**
colours and **three**
shapes.




38360 ARET DTO B/W
max 10W



38361 ARET DTO W/W
max 10W




38362 ARET DTO B/B
max 10W

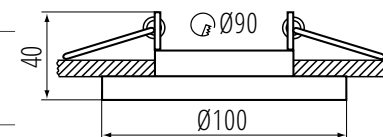

38363 ARET DTL B/W
max 10W



38364 ARET DTL W/W
max 10W

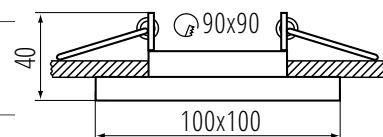


38365 ARET DTL B/B
max 10W



38366 ARET 2xDTL B/W
2 x max 10W



38367 ARET 2xDTL W/W
2 x max 10W

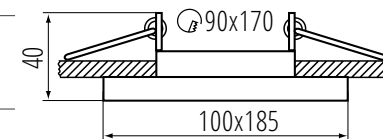

38368 ARET 2xDTL B/B
2 x max 10W

Kanlux

Kanlux ARET

Technical data:

Rated voltage [V]: 12 AC; DC; 220-240 AC

Maximum power: max 10 W (LED sources only)

Class of protection against electric shock: II/III

Light source: MR16 LED / PAR16 LED*

Cap: Gx5,3/GU10

Material: aluminium alloy

Protection class: IP20

Angle adjustment of the lighting fixture in one axis: 30°.

*lamp holder and source of light not included



packed well

kanlux.com