


Kanlux

Modular floodlight
Kanlux
FL STADER

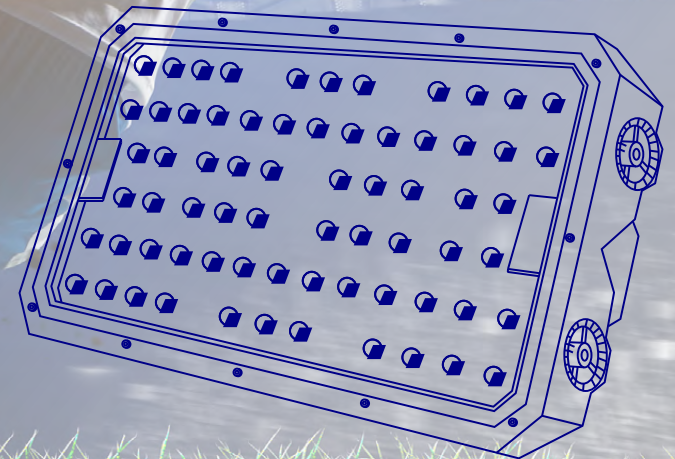


Kanlux

Kanlux **FL STADER**

Lighting freedom at a new level
– the first modular floodlight in
the KANLUX range



Thanks to the modular design, you
can freely customize the lighting by
choosing one or two modules.

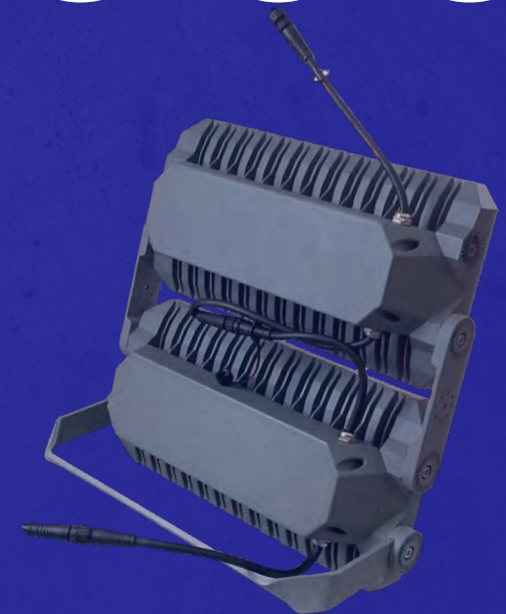


* 5 year warranty under the terms of the warranty statement available on the website.

Kanlux

Kanlux **FL STADER**
Possibility to connect 2 modules

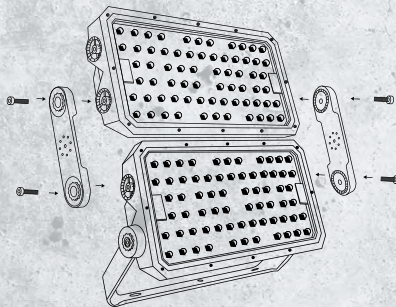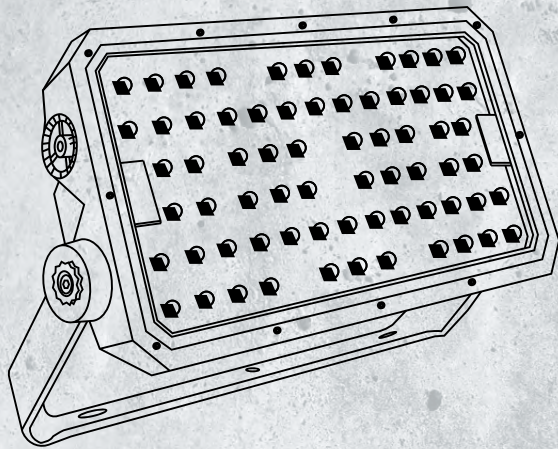

FL STADER
1 or 2 modules

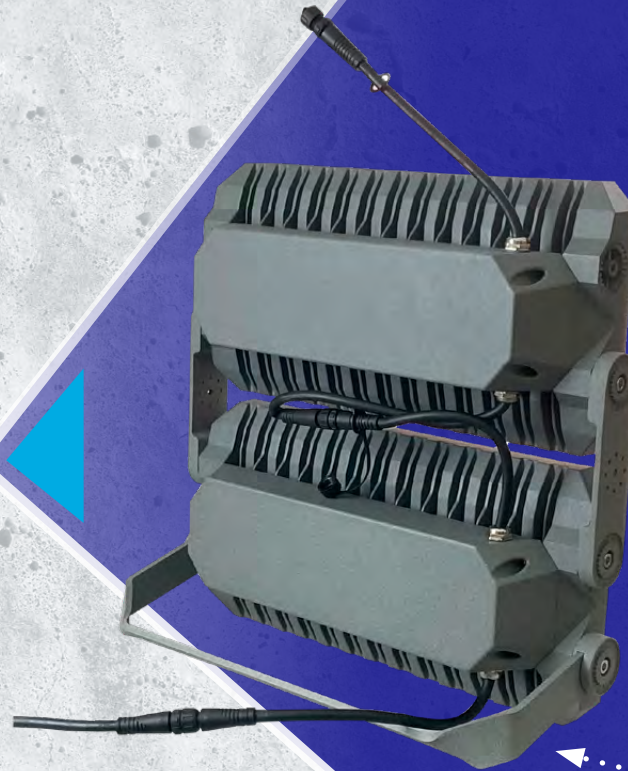


MOUNTING
BRACKET

ELEMENT
CONNECTING
MODULES


**example connection
of 2 modules**

FLS BRACKET

Index: 38601

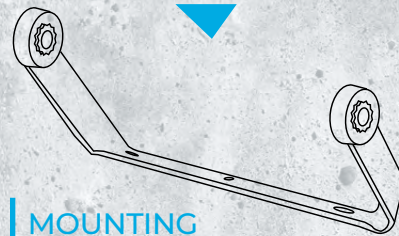


MOUNTING
BRACKET

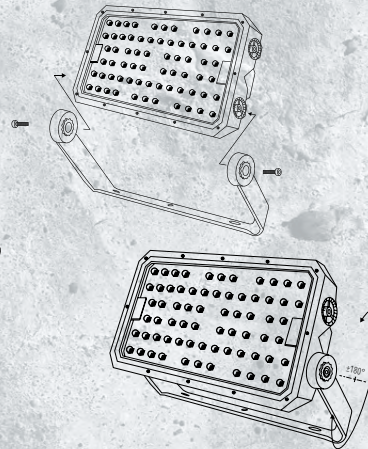


FLS CON ELE

Index: 38602


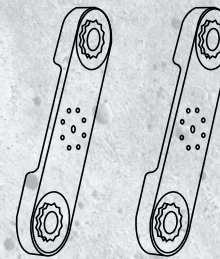


MODULE
CONNECTING
ELEMENT
(2 PCS = 1 SET)

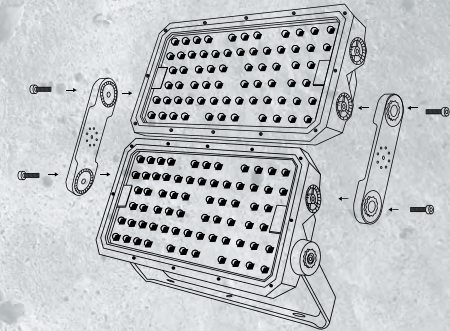

FLS LENS 20D


Index: 38603



LENS 20°

FLS LENS 40D



Index: 38604



LENS 40°

FLS LENS 90D

Index: 38605



LENS 90°

Kanlux



Wide range of professional applications.

Kanlux

Kanlux **FL STADER**



38600	FL STADER 200W NW	200W	30000lm	33500lm	4000K	C
--------------	-------------------	------	---------	---------	-------	---

Nominal voltage [V]: 220-240 AC

Power of one floodlight module: 200W

Maximum number of connected modules: 2 pcs.


Efficiency: 150lm/W

Mounting: Mounting bracket with angle adjustment

Housing material: cast aluminum + PC diffuser

Color temperature: 4000K

Beam angle: 60 degree

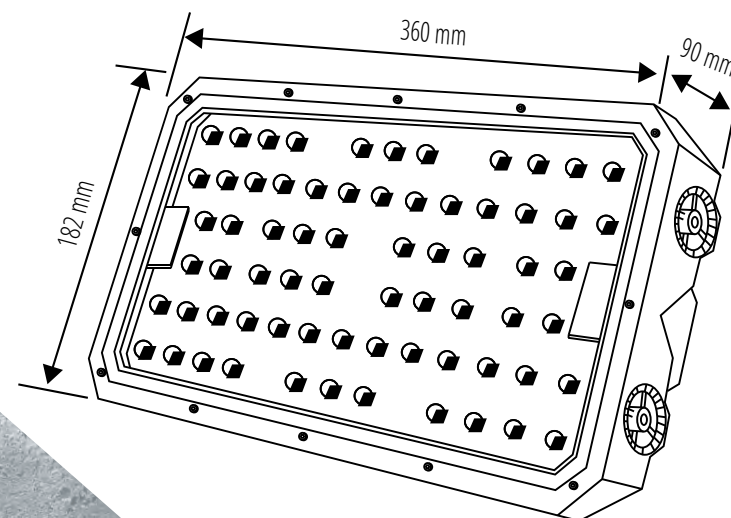

CONNECTING
CABLES

max 105°

CABLE
CONNECTING
MODULES

CONNECTING
CABLES

max 150°