

# ***Kanlux***



**Kanlux DABER**

wall/ceiling bulkheads  
for professional use

# Kanlux

## KANLUX DABER

new series of wall/ceiling lamps:

- **two colours to choose from:**  
white (W) and black (B)
- **two versions:**  
with motion sensor (SE) and  
without motion sensor
- **two body sizes:**  
251 mm and 301 mm



**B**  
**black**



**W**  
**white**



# Kanlux

## KANLUX DABER

4 power options  
in each model



8.5W-13W  
12.5W-20W



3 colour  
temperatures

Color temperature can be adjusted.  
Temperature selection is made  
using a DIP switch inside the  
fixture.

Colour temperature adjustment  
allows for customization to  
individual user preferences.



The fixture is  
equipped with  
**quick  
connectors**  
for easy  
installation.



3000K



3500K



4000K



# Kanlux

## KANLUX DABER

IP  
66

The **IP66** tightness of the DABER luminaire means high resistance to weather conditions.

10IK

DABER offers **IK10** impact resistance (**vandal-proof** luminaire) plus additional protection against opening.

5  
WARRANTY  
5 years

5-year warranty.

\* 5-year warranty under the terms of the warranty statement available on the website






# Kanlux

**Kanlux DABER** with a motion sensor is equipped with a remote control that speeds up and facilitates programming of sensor parameters, without the need to interfere with the installed luminaire.

## Kanlux DABER with motion sensor

Sensor parameters:

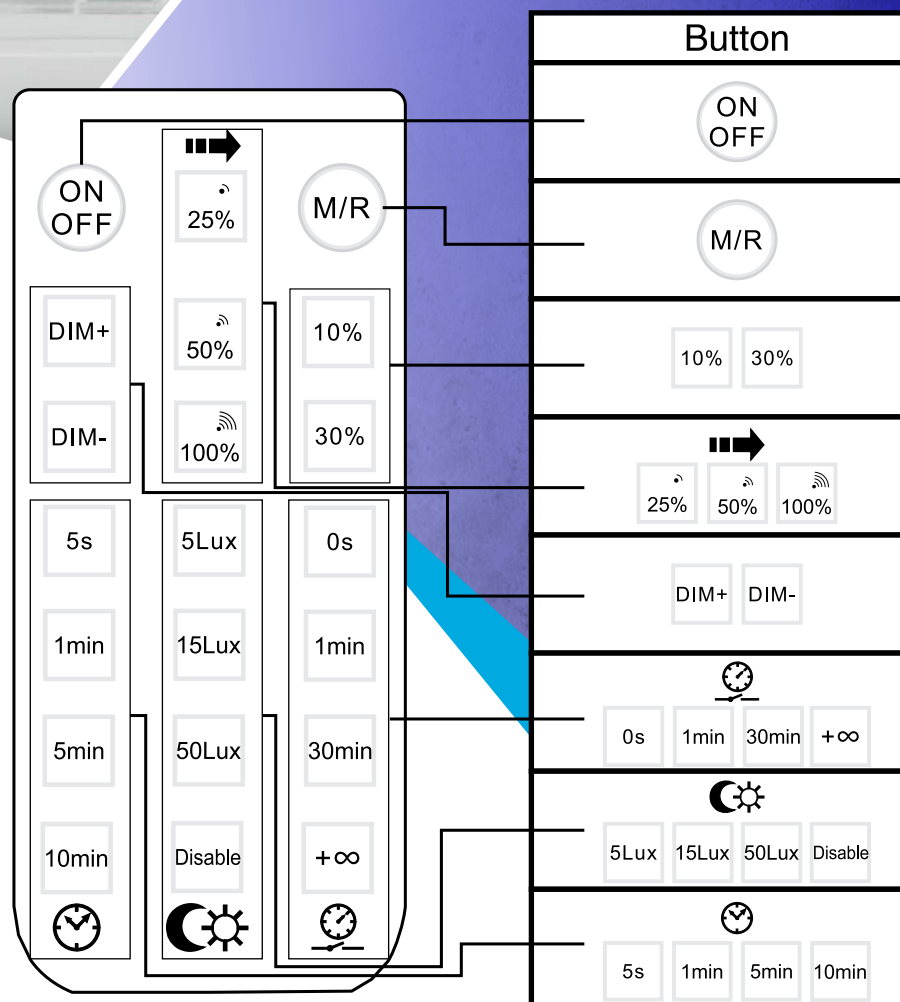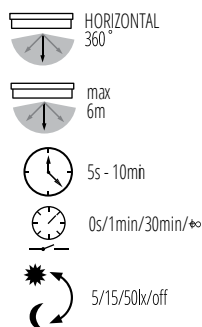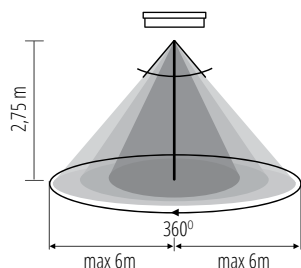


### Button




Manually turning the luminaire on/off, bypassing motion detection mode




Returning to the last settings /to the factory settings



Luminaire power level in standby mode



Sensitivity level/range of the luminaire's motion detection



Dimming function from 100 to 50% (5% increments)



Setting the standby time of the function



Light intensity level when activating the luminaire



Light fixture operating time

The batteryNot Included.. Dedicated battery: CR2025




# Kanlux



**Kanlux DABER**

perfect for any investment

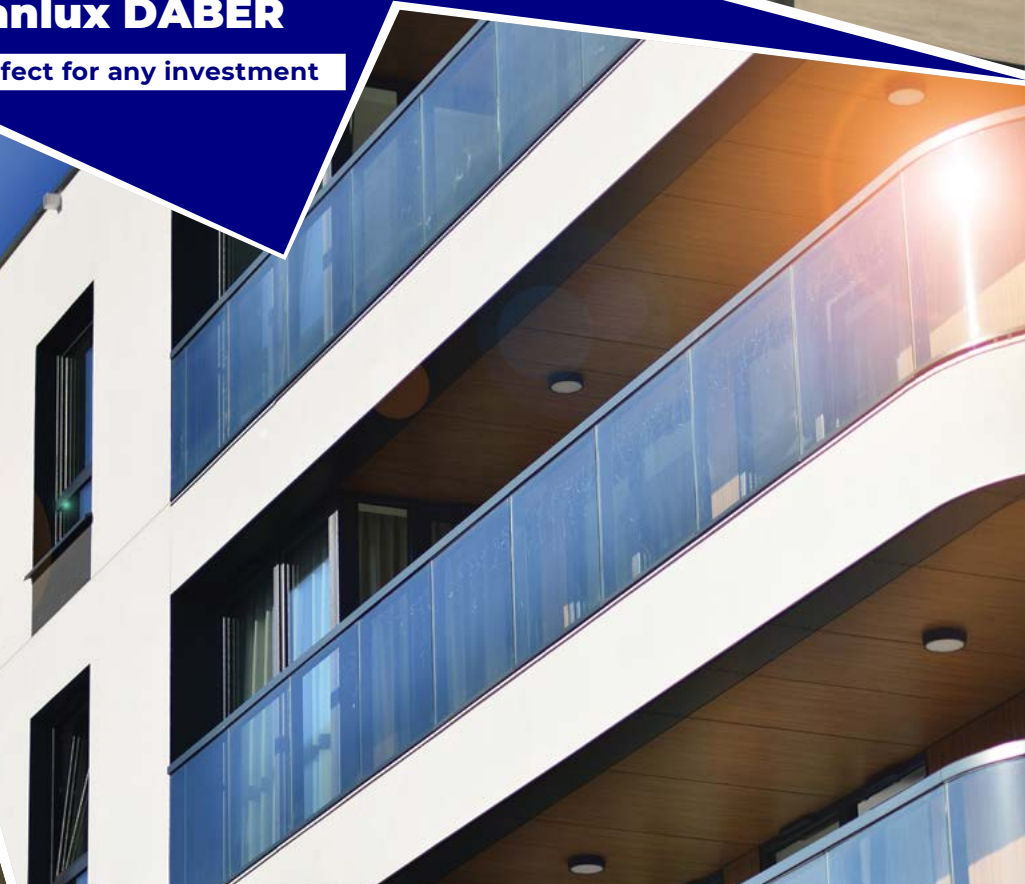

## KANLUX DABER SERIES

Power range  
and color temperatures



**DABER 8-13W CCT B**

	150mA		180mA		220mA		250mA	
	Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power
3000K	900	8,5	1050	9,5	1270	11,5	1420	13,0
3500K	910		1060		1280		1430	
4000K	940		1100		1330		1490	

**DABER 8-13W CCT W**

	150mA		180mA		220mA		250mA	
	Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power
3000K	930	8,5	1090	9,5	1310	11,5	1450	13,0
3500K	940		1100		1320		1460	
4000K	970		1120		1360		1510	

**DABER 12-20W CCT B**

	150mA		180mA		220mA		250mA	
	Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power
3000K	1500	12,5	1780	15,0	2160	18,0	2450	20,0
3500K	1520		1810		2210		2480	
4000K	1600		1890		2290		2560	

**DABER 12-20W CCT W**

	150mA		180mA		220mA		250mA	
	Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power
3000K	1540	12,5	1810	15,0	2200	18,0	2500	20,0
3500K	1560		1860		2220		2530	
4000K	1640		1970		2350		2630	

**DABER 8-13W CCT SE B**

	150mA		180mA		220mA		250mA	
	Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power
3000K	900	8,5	1050	9,5	1270	11,5	1420	13,0
3500K	910		1060		1280		1430	
4000K	940		1100		1330		1490	

**DABER 8-13W CCT SE W**

	150mA		180mA		220mA		250mA	
	Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power
3000K	930	8,5	1090	9,5	1310	11,5	1450	13,0
3500K	940		1100		1320		1460	
4000K	970		1120		1360		1510	

**DABER 12-20W CCT SE B**

	150mA		180mA		220mA		250mA	
	Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power
3000K	1500	12,5	1780	15,0	2160	18,0	2450	20,0
3500K	1520		1810		2210		2480	
4000K	1600		1890		2290		2560	

**DABER 12-20W CCT SE W**

	150mA		180mA		220mA		250mA	
	Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power
3000K	1540	12,5	1810	15,0	2200	18,0	2500	20,0
3500K	1560		1860		2220		2530	
4000K	1640		1970		2350		2630	

# Kanlux

## Technical information:





DABER 8-13W CCT W	<b>39020</b>	8,5-13W	1510lm	3000/	no	white
DABER 8-13W CCT SE W	<b>39021</b>				yes	white
DABER 8-13W CCT B	<b>39022</b>				no	black
DABER 8-13W CCT SE B	<b>39023</b>	12,5-20W	2630lm	4000K	yes	black
DABER 12-20W CCT W	<b>39024</b>				no	white
DABER 12-20W CCT SE W	<b>39025</b>				yes	white
DABER 12-20W CCT B	<b>39026</b>				no	black
DABER 12-20W CCT SE B	<b>39027</b>				yes	black

### Parameters:

- Power supply 220-240V~50Hz
- Protection class against electric shock: II
- Luminaire lifespan: >50,000 hours
- Number of on/off cycles: >50,000x
- Housing material: polycarbonate
- Lens material: polycarbonate

loop-through facility.

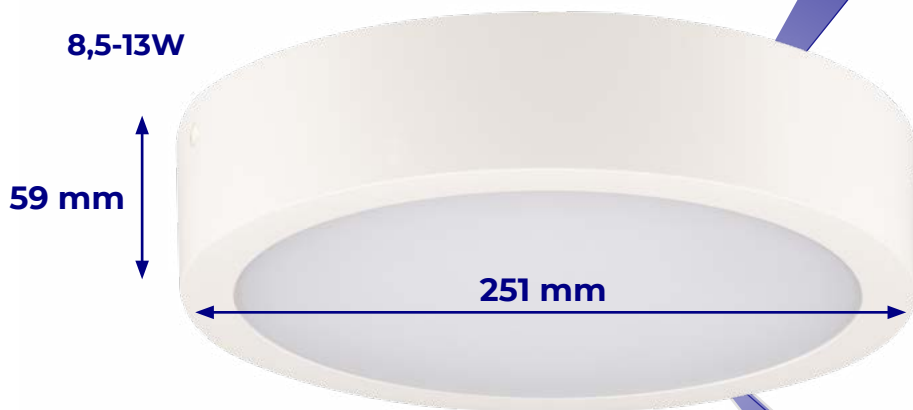

**Well packed**