

Kanlux



**Kanlux
BLINGO UHRA**

* PANELS WITHOUT POWER SUPPLY INCLUDED

Kanlux

Kanlux BLINGO UHRA

**They have a high
color rendering index
CRI>97**



Ra97+
true colors

Artificial light can distort our color vision, but with BLINGO UHRA, you'll see all colors as they truly are. These panels boast an exceptionally high color rendering index (Ra>97)*, which translates into a natural color perception by the human eye.

*Standard LED products have Ra>80, while natural light is Ra=100

Kanlux

Panels Kanlux BLINGO UHRA



They emit significantly less blue light. This is important because excessive blue light is detrimental to your health and well-being. Artificial blue light can negatively impact your concentration or vision.




Kanlux BLINGO UHRA


They emit light with a full color spectrum, so they affect us similarly to natural daylight and provide comfortable conditions during all daily activities.




Kanlux



The most popular lighting control standard. It allows for the creation of both simple and highly complex lighting systems and integrated devices. The power supply also enables dimming using the popular doorbell switch without the need for additional devices.



One of the basic lighting control systems, it uses a 1-10V rotary dimmer. It allows you to adjust the amount of light provided by the lighting system to changing indoor conditions or user preferences. It also helps reduce electricity consumption.



A basic method of controlling the operation of electrical devices based on the following states: off and on.






**LIGHT
CONTROL**

Kanlux BLINGO UHRA Dedicated power supplies

FLEXIBLE
**POWER
SUPPLY
SELECTION**
ACCORDING
TO CUSTOMER NEEDS



Kanlux BLINGO UHRA




- ON/OFF
(3 power options 24W, 32W, 40W)
- dimming 1-10V (BOKE brand)
- DALI (BOKE brand)


INDEX	NAME	MAX POWER	OUTPUT	DRIVER
37267	BLINGO DRV42W DALI BK	42W	1-10mA	DALI
37268	BLINGO DRV40W1-10V BK	40W	600-1050mA	1-10V
37269	BLINGO DRV 32W ON-OFF	32W	850mA	ON-OFF
37270	BLINGO DRV 40W ON-OFF	40W	1100mA	ON-OFF
37272	BLINGO DRV 24W ON-OFF	24W	600mA	ON-OFF

Nominal voltage: 220-240 V
Material: plastic
Protection class: II
IP: 20







FLEXIBLE SELECTION OF POWER SUPPLY

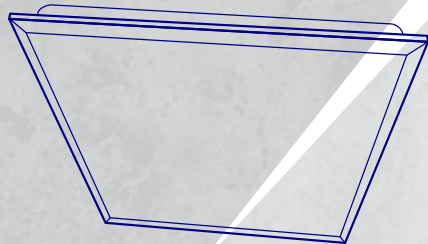

39170 BLINGO UHRA 95 60NW

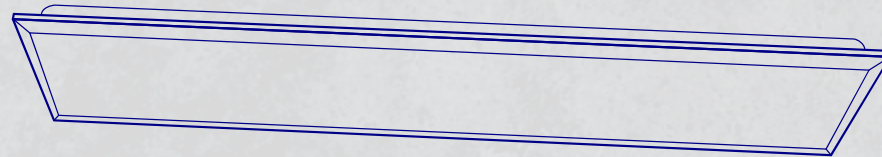


39171 BLINGO UHRA 95 120NW

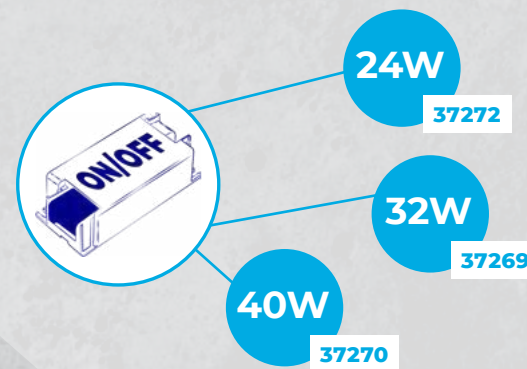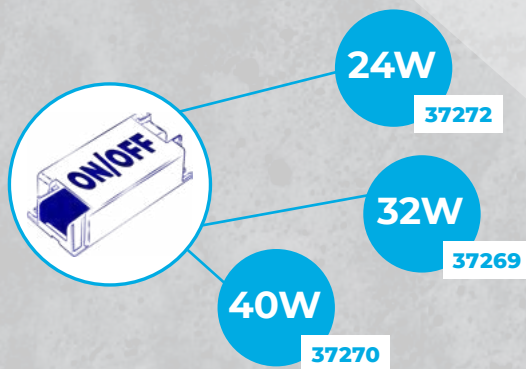


Kanlux BLINGO UHRA

39170 595 x 595 x 30

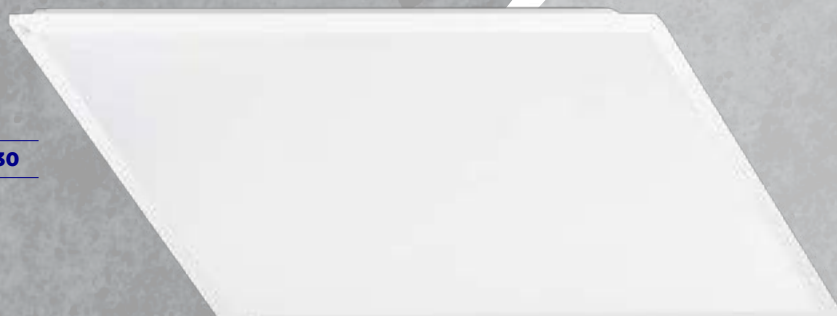

39171 295 x 1195 x 30

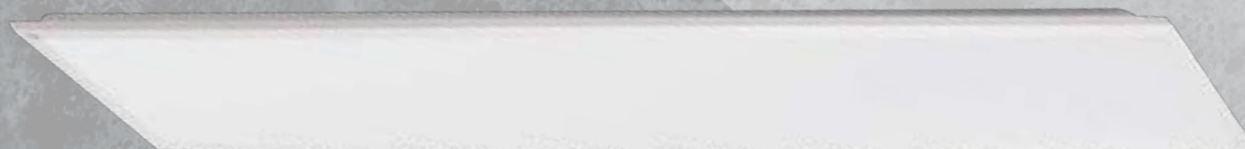

Mounting location: recessed into the ceiling
 Integrated LED light source: yes
 Power supply current: 600 - 1100 [mA]
 Beam angle: 90°
 Shade type: microprismatic
 Housing material: steel
 Panel/frame material: aluminum
 Connection type: cable terminated with a DC plug
 Power supply type: DC
 IP rating: 20
 UGR: below 19

INDEX	NAME	AMX POWER	MAX LUMEN PANEL FLUX	DEDICATED ON-OFF POWER SUPPLY
39170	BLINGO UHRA 95 60NW	max 40W	2280 (600mA) / 3040 (850mA) / 3800 (1100mA)	driver: 37272 (600mA) / 37269 (850mA) / 37270 (1100mA)
39171	BLINGO UHRA 95 120NW	max 40W	2280 (600mA) / 3040 (850mA) / 3800 (1100mA)	driver: 37272 (600mA) / 37269 (850mA) / 37270 (1100mA)

* 5 YEAR WARRANTY UNDER THE TERMS OF THE WARRANTY STATEMENT AVAILABLE ON THE WEBSITE



Kanlux

**Kanlux
BLINGO UHRA**

Irreplaceable
in many spaces.




Kanlux

**Kanlux
BLINGO UHRA**

Irreplaceable
in many spaces.

Kanlux

**Kanlux BLINGO UHRA
WELL PACKED**

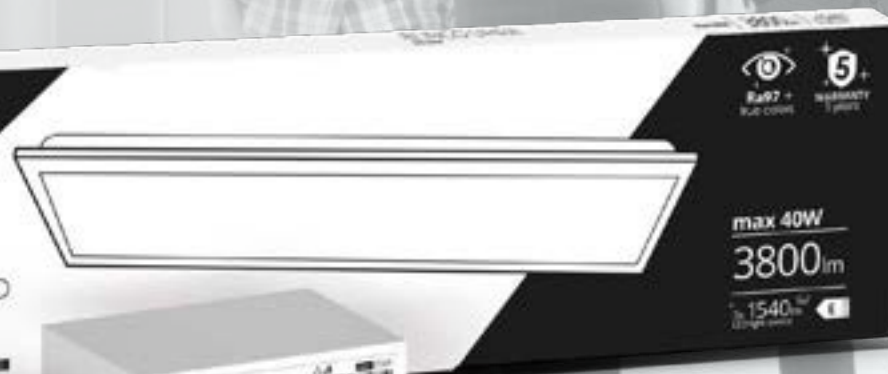

kanlux.com