

Kanlux

**LED
STRIPS
Kanlux
LCOB**

Kanlux


Kanlux LED STRIP COB MONO

The COB LED strip allows you to achieve a uniform and effective line of light, regardless of the profile depth and shade transparency.

It provides true-to-life color reproduction thanks to its high color rendering index of $Ra \geq 90$.

* For low-power models, $Ra \geq 80$ is 3W/m.


- ✓ Available in 12V (3W/M, 8W/M, and 10W/M) and 24V (3W/M and 10W/M) versions.
- ✓ Three color temperatures: WW (3000K), NW (4000K), CW (6500K).
- ✓ Ingress protection: IP00 and IP65.
- ✓ Available in three lengths: 5m, 25m, and 50m.

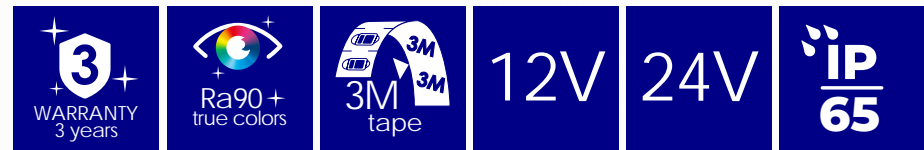



Connectors for LED strips STRIP COB

Designed for 12V and 24V COB LED strips
8 mm wide, max 2A.



- ✓ They enable quick and easy connection of strips with a clamp, without the need for soldering.
- ✓ Made of transparent plastic, they provide a uniform line of light without creating shadows along the strip connection line.
- ✓ Material: polycarbonate and copper
- ✓ Packaging: 10 pieces per package

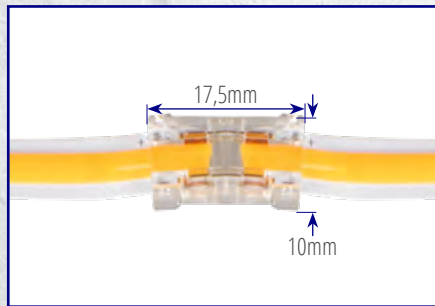



38472 CON P 8

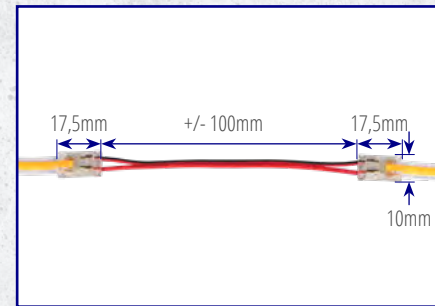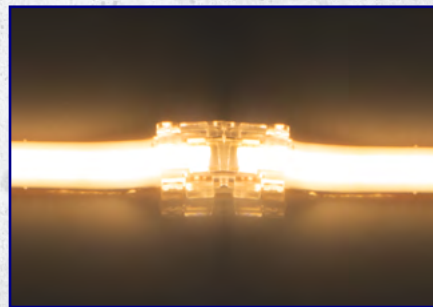


38471 CON P 8 CPC

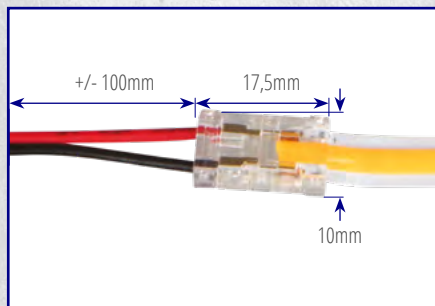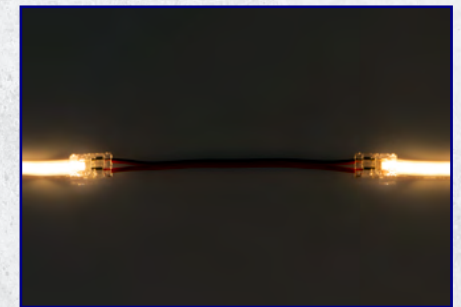

38470 CON P 8 CP

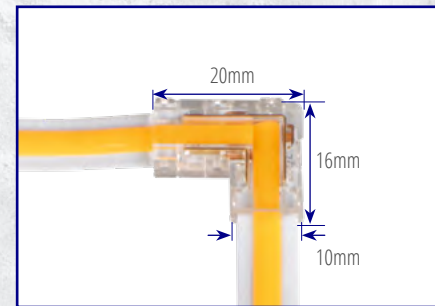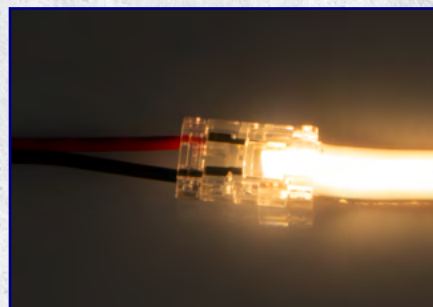

38473 CON P 8 L

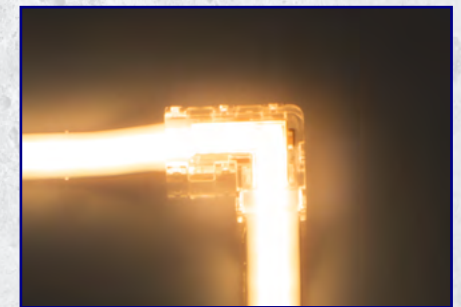


Kanlux

Kanlux LED STRIP COB CCT


NEW

LCOB 14W/M 12IP00-CCT	38911
LCOB 14W/M 12IP65-CCT	38912
LCOB 14W/M 24IP00-CCT	38437
LCOB 14W/M 24IP65-CCT	38438

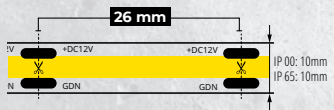

The Kanlux LED COB CCT strip allows you to adjust the light colour from warm (2700K) to neutral (4000K) to cool (6500K), tailoring the lighting to your specific interior or mood. COB technology and high diode density (608 LEDs/m) ensure uniform light emission along the entire length of the strip, without visible light spots.

- ✓ Available in 12V (14W/M) and 24V (14W/M) versions.
- ✓ Colour: CCT (2700K - 6500K).
- ✓ Ingress protection: IP00 and IP65
- ✓ Length: 5m.

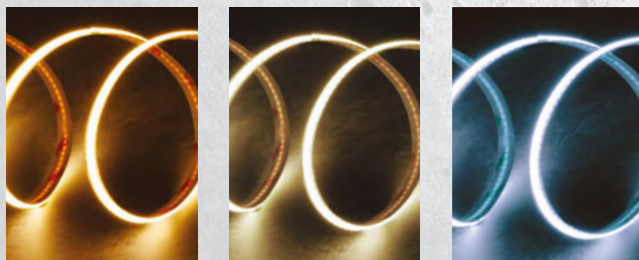


Kanlux

Kanlux LED STRIP COB RGB

NEW


LCOB 15W/M 24 IP00RGB **38430**

LCOB 15W/M 24 IP65RGB **38431**

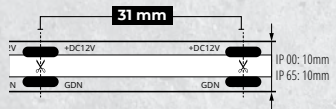

The COB RGB LED strip provides a uniform, crisp line of light over long distances, ideal for decorative lighting. It allows for a variety of colour and offers a wide range of design options.

- ✓ available in 24V version (15W/M)
- ✓ colour: RGB tightness:
- ✓ IP00 and IP65 length:
- ✓ 5m

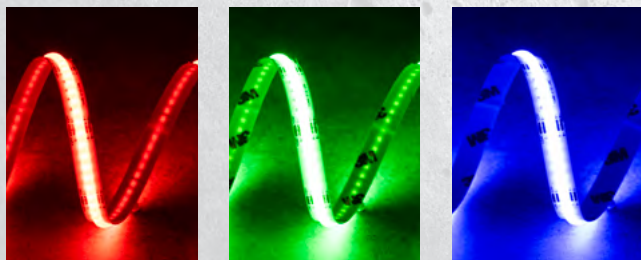


Connectors for LED STRIP COB RGB strips



Designed for 12V and 24V COB LED strips
10 mm wide, max 2A.

- ✓ allow for quick assembly of clamp tapes, without the need for soldering
- ✓ made of transparent material, they provide a uniform line of light without creating shadows on the line where the tapes join
- ✓ material: polycarbonate and copper
- ✓ packaging: 10 pcs per package



38474 CON P 10 RGB

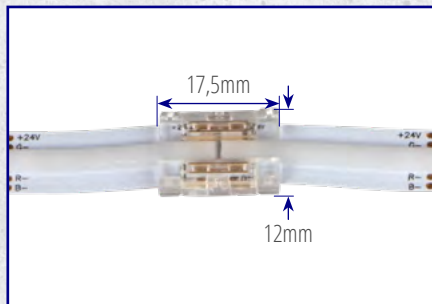

38475 CON P 10 RGB CP

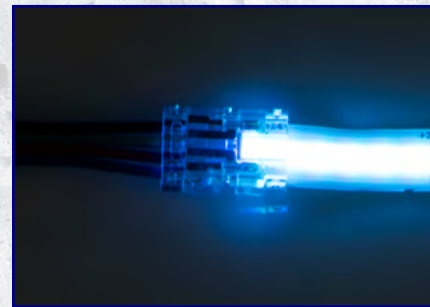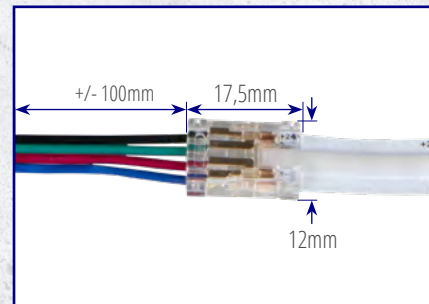

38476 CON P 10 RGB CPC

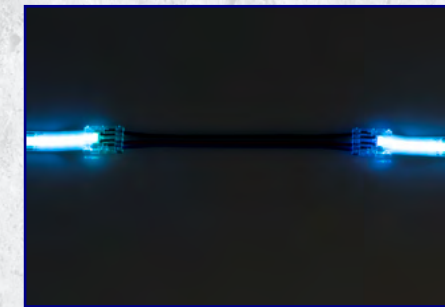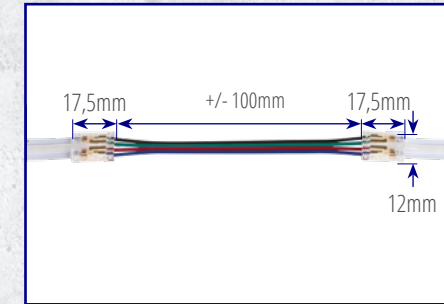

Kanlux


Kanlux LED STRIP COB RGBW



NEW


LCOB 19W/M24IP00-RGBW **38913**

LCOB 19W/M24IP65-RGBW **38914**

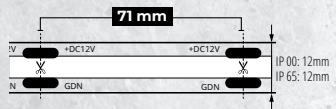

The Kanlux LED RGBW strip offers extensive colour selection thanks to RGB and NW white (4000K). It creates striking lighting for interiors, furniture highlights, and decorative arrangements.

- ✓ Available in 24V (19W/M)
- ✓ Colour: RGB+4000K
- ✓ Ingress protection: IP00 and IP65
- ✓ Length: 5m

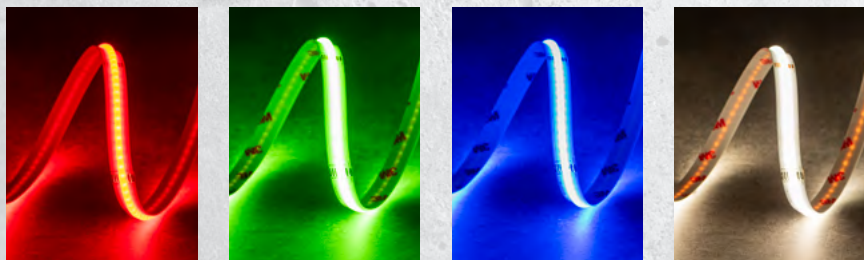

Kanlux


Kanlux LED STRIP COB RGB CCT



NEW


LCOB21W/M24IP00RGBCCT **38915**

LCOB21W/M24IP65RGBCCT **38916**

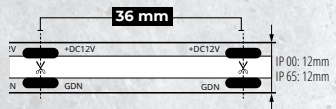

Kanlux LED COB RGB CCT is a single strip designed for multiple functions. It offers universal use thanks to its RGB, WW (3000K) and CW (6100K) colour palettes. The lighting can fulfill many roles depending on your needs and mood. The uniform, smooth lighting effect thanks to COB technology makes the light look natural and elegant.

- ✓ Available in 24V (21W/M)
- ✓ Color: RGB + CCT (3000K - 6100K)
- ✓ Ingress protection: IP00 and IP65
- ✓ Length: 5m

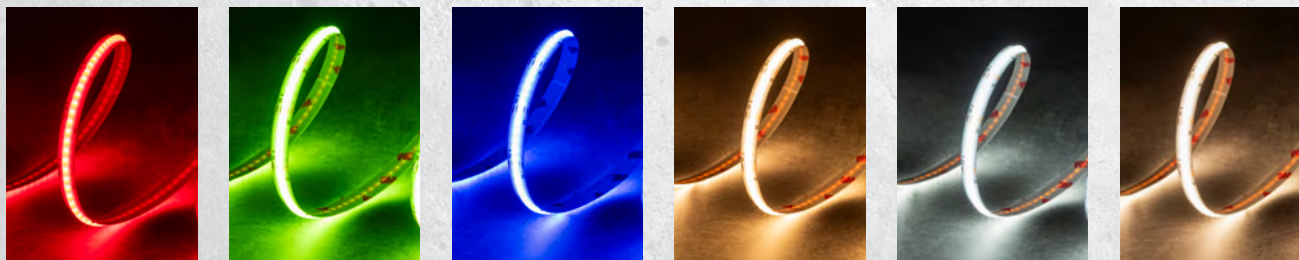


Kanlux



**STRIPS
Kanlux LED COB**


they will illuminate and decorate apartments

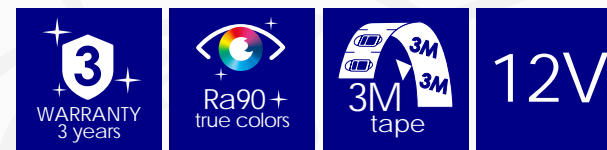

NEW

COB CCT 12V


		TYPE	VOLTAGE RATED [V]	POWER RATED [W]	LUMINOUS FLUX [LM]/1M	COLOUR TEMPERATURE [K]	QUANTITY LED /1m	Ra	IP	CUT [mm]	WIDTH [mm]	CLASS	RoHS [M]
38911	LCOB 14W/M 12IP00-CCT	COB	12V	7W/m	560 lm/m (WW)	od 2700K do 6500K	608	90	00	26 mm	10 mm	G	5m
				14W/m	700 lm/m (CW) 1260 lm/m (NW)								
38912	LCOB 14W/M 12IP65-CCT	COB	12V	7W/m	560 lm/m (WW)	od 2700K do 6500K	608	90	65	26 mm	10 mm	G	5m
				14W/m	700 lm/m (CW) 1260 lm/m (NW)								




NEW

COB MONO 12V

		TYPE	VOLTAGE RATED [V]	POWER RATED [W]	LUMINOUS FLUX [LM]/1M	COLOUR TEMPERATURE [K]	QUANTITY LED /1m	Ra	IP	CUT [mm]	WIDTH [mm]	CLASS	RoHS [M]
39160	LCOB 3W/M 12 IP00-WW	COB	12V	3W/m	288 lm/m	3000K	320	80	00	25 mm	8 mm	F	5m
39161	LCOB 3W/M 12 IP00-NW	COB	12V		316 lm/m	4000K	320	80	00	25 mm	8 mm	F	
39162	LCOB 3W/M 12 IP65-WW	COB	12V		276 lm/m	3000K	320	80	65	25 mm	8,2 mm	F	
39163	LCOB 3W/M 12 IP65-NW	COB	12V	300 lm/m	4000K	320	80	65	25 mm	8,2 mm	F		
33364	LCOB 8W/M 12 IP00-WW	COB	12V	8W/m	720 lm/m	3000K	320	90	00	25 mm	8 mm	G	
33366	LCOB 8W/M 12 IP00-NW	COB	12V		760 lm/m	4000K	320	90	00	25 mm	8 mm	F	
38909	LCOB 8W/M 12 IP00-CW	COB	12V		800 lm/m	6500K	320	90	00	25 mm	8 mm	F	
33365	LCOB 8W/M 12 IP65-WW	COB	12V	8W/m	680 lm/m	3000K	320	90	65	25 mm	8,2 mm	G	
33367	LCOB 8W/M 12 IP65-NW	COB	12V		720 lm/m	4000K	320	90	65	25 mm	8,2 mm	G	
38910	LCOB 8W/M 12 IP65-CW	COB	12V		760 lm/m	6500K	320	90	65	25 mm	8,2 mm	F	
38435	LCOBB 8W/M 12 IP00-WW	COB	12V	8W/m	720 lm/m	3000K	320	90	00	25 mm	8 mm	G	25m
38436	LCOBB 8W/M 12 IP00-NW	COB	12V		760 lm/m	4000K	320	90	00	25 mm	8 mm	F	
38900	LCOBC 8W/M 12 IP00-WW	COB	12V	8W/m	736 lm/m	3000K	320	90	00	25 mm	8 mm	F	50m
38901	LCOBC 8W/M 12 IP00-NW	COB	12V		800 lm/m	4000K	320	90	00	25 mm	8 mm	F	
38902	LCOBC 8W/M 12 IP00-CW	COB	12V		800 lm/m	6500K	320	90	00	25 mm	8 mm	F	
37230	LCOB 10W/M 12 IP00-WW	COB	12V	10W/m	920 lm/m	3000K	320	90	00	25 mm	8 mm	F	5m
37231	LCOB 10W/M 12 IP00-NW	COB	12V		1000 lm/m	4000K	320	90	00	25 mm	8 mm	F	
37232	LCOB 10W/M 12 IP65-WW	COB	12V		860 lm/m	3000K	320	90	65	25 mm	8,2 mm	G	
37233	LCOB 10W/M 12 IP65-NW	COB	12V	10W/m	950 lm/m	4000K	320	90	65	25 mm	8,2 mm	F	50m
38903	LCOBC 10W/M 12IP00-WW	COB	12V		920 lm/m	3000K	320	90	00	25 mm	8 mm	F	
38904	LCOBC 10W/M 12IP00-NW	COB	12V		1000 lm/m	4000K	320	90	00	25 mm	8 mm	F	
38905	LCOBC 10W/M 12IP00-CW	COB	12V		1000 lm/m	6500K	320	90	00	25 mm	8 mm	F	

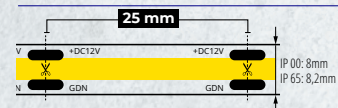


* 3 YEAR WARRANTY UNDER THE TERMS OF THE WARRANTY STATEMENT AVAILABLE ON THE WEBSITE

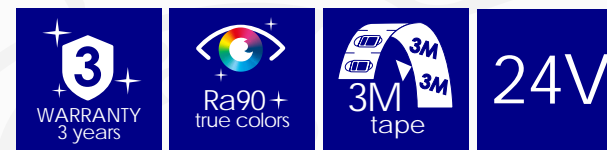

COB CCT 24V


	TYPE	VOLTAGE RATED [V]	POWER RATED [W]	LUMINOUS FLUX [LM]/1M	COLOUR TEMPERATURE [K]	QUANTITY LED /1m	Ra	IP	CUT [mm]	WIDTH [mm]	CLASS		
38437	LCOB 14W/M 24IP00-CCT	COB	24V	7W/m	560 lm/m (WW)	608	90	00	26 mm	10 mm	G		5m
				14W/m	700 lm/m (CW) 1260 lm/m (NW)								
38438	LCOB 14W/M 24IP65-CCT	COB	24V	7W/m	560 lm/m (WW)	608	90	65	26 mm	10 mm	G		5m
				14W/m	700 lm/m (CW) 1260 lm/m (NW)								

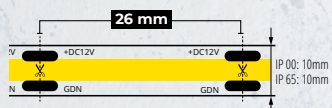


COB MONO 24V

NEW

	TYPE	VOLTAGE RATED [V]	POWER RATED [W]	LUMINOUS FLUX [LM]/1M	COLOUR TEMPERATURE [K]	QUANTITY LED /1m	Ra	IP	CUT [mm]	WIDTH [mm]	CLASS	
39164	LCOB 3W/M 24 IP00-WW	COB	24V	288 lm/m	3000K	320	80	00	50 mm	8 mm	F	5m
39165	LCOB 3W/M 24 IP00-NW	COB	24V	316 lm/m	4000K	320	80	00	50 mm	8 mm	F	
39168	LCOB 3W/M 24 IP00-CW	COB	24V	316 lm/m	6500K	320	80	00	50 mm	8 mm	F	
39166	LCOB 3W/M 24 IP65-WW	COB	24V	276 lm/m	3000K	320	80	65	50 mm	8,2 mm	F	
39167	LCOB 3W/M 24 IP65-NW	COB	24V	300 lm/m	4000K	320	80	65	50 mm	8,2 mm	F	
39169	LCOB 3W/M 24 IP65-CW	COB	24V	300 lm/m	6500K	320	80	65	50 mm	8,2 mm	F	
33351	LCOB 10W/M 24 IP00-WW	COB	24V	920 lm/m	3000K	480	90	00	50 mm	8 mm	F	5m
33368	LCOB 10W/M 24 IP00-NW	COB	24V	1000 lm/m	4000K	480	90	00	50 mm	8 mm	F	
33353	LCOB 10W/M 24 IP00-CW	COB	24V	1050 lm/m	6500K	480	90	00	50 mm	8 mm	F	
33352	LCOB 10W/M 24 IP65-WW	COB	24V	860 lm/m	3000K	480	90	65	50 mm	8,2 mm	G	
33369	LCOB 10W/M 24 IP65-NW	COB	24V	920 lm/m	4000K	480	90	65	50 mm	8,2 mm	F	
33354	LCOB 10W/M 24 IP65-CW	COB	24V	1000 lm/m	6500K	480	90	65	50 mm	8,2 mm	F	
38432	LCOBB 10W/M 24IP00-WW	COB	24V	920 lm/m	3000K	480	90	00	50 mm	8 mm	F	25m
38433	LCOBB 10W/M 24IP00-NW	COB	24V	1000 lm/m	4000K	480	90	00	50 mm	8 mm	F	
38434	LCOBB 10W/M 24IP00-CW	COB	24V	1050 lm/m	6500K	480	90	00	50 mm	8 mm	F	
38906	LCOBC 10W/M 24IP00-WW	COB	24V	920 lm/m	3000K	480	90	00	50 mm	8 mm	F	50m
38907	LCOBC 10W/M 24IP00-NW	COB	24V	1000 lm/m	4000K	480	90	00	50 mm	8 mm	F	
38908	LCOBC 10W/M 24IP00-CW	COB	24V	1050 lm/m	6500K	480	90	00	50 mm	8 mm	F	

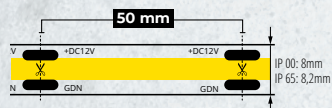


* 3 YEAR WARRANTY UNDER THE TERMS OF THE WARRANTY STATEMENT AVAILABLE ON THE WEBSITE

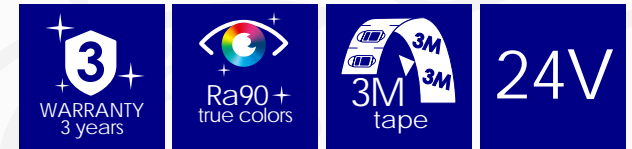

COB RGB 24V


	TYPE	VOLTAGE RATED [V]	POWER RATED [W]	LUMINOUS FLUX [LM]/ 1M	COLOUR TEMPERATURE [K]	QUANTITY LED /1m	Ra	IP	CUT [mm]	WIDTH [mm]	[M]	
38430	LCOB 15W/M 24 IP00RGB	24V	15W/m	max 470lm/m	RGB	672	-	00	31 mm	10 mm	5m	
38431	LCOB 15W/M 24 IP65RGB	24V		max 450lm/m	RGB	672	-	65	31 mm	10 mm		

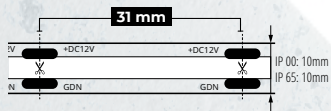

NEW

COB RGBW 24V


	TYPE	VOLTAGE RATED [V]	POWER RATED [W]	LUMINOUS FLUX [LM]/ 1M	COLOUR TEMPERATURE [K]	QUANTITY LED /1m	Ra	IP	CUT [mm]	WIDTH [mm]	[M]	
38913	LCOB 19W/M24IP00-RGBW	24V	19W/m 5,3W/m (NW)	600lm/m (RGB) 420lm/m (NW)	RGB	784	90	00	71 mm	12 mm	5m	
38914	LCOB 19W/M24IP65-RGBW	24V	19W/m 5,3W/m (NW)	600lm/m (RGB) 420lm/m (NW)	+4000K	784	90	65	71 mm	12 mm		

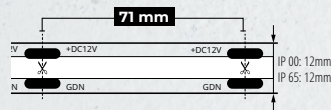

NEW

COB RGB CCT 24V

	TYPE	VOLTAGE RATED [V]	POWER RATED [W]	LUMINOUS FLUX [LM]/ 1M	COLOUR TEMPERATURE [K]	QUANTITY LED /1m	Ra	IP	CUT [mm]	WIDTH [mm]	[M]	
38915	LCOB21W/M24IP00RGCCT	24V	21W/m max 11W/m (RGB) 5W/m (WW) max 10W/m (CW+WW)	440lm/m (RGB) 340lm/m (WW) 680lm/m (CW+WW)	RGB+ od 3000K do 6100K	840	90	00	36 mm	12 mm	5m	
38916	LCOB21W/M24IP65RGCCT	24V	21W/m max 11W/m (RGB) 5W/m (WW) max 10W/m (CW+WW)	440lm/m (RGB) 340lm/m (WW) 680lm/m (CW+WW)	RGB+ od 3000K do 6100K	840	90	00	36 mm	12 mm		

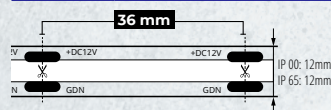


* 3 YEAR WARRANTY UNDER THE TERMS OF THE WARRANTY STATEMENT AVAILABLE ON THE WEBSITE

Kanlux

Kanlux LED STRIP COB



BETTER TOGETHER



well
packed

kanlux.com