

26684 ASTEN IP44 12W-NW-B

LED wall mounted fitting

IP
44



Kanlux ASTEN LED is a linear wall luminaire to be used in places with increased humidity (IP44). You can easily mount it above the bathroom mirror. The lamp has a built-in light source based on SMD LED diodes, which lifetime is at least 25,000 hours.

GENERAL DATA:


Colour: black
Place of assembly: wall mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,1m
Compatible with a dimmer: no
Fixture lighting direction: down
Length [mm]: 600
Width [mm]: 110
Height [mm]: 42
Mercury content in the lamp [mg]: 0
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 12
Class of protection against electric shock: II
Lampshade material: plastic
Enclosure material: aluminum alloy
Diode type: LED SMD
Luminous flux [lm]: 910
Useful luminous flux of the light source Φ_{use} [lm]: 1450
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Service life [h]: 25000
Number of on/off cycles: ≥ 15000
Lighting angle [°]: X120/Y105
Luminous efficiency of the lamp [lm/W]: 76

26684 ASTEN IP44 12W-NW-B

LED wall mounted fitting

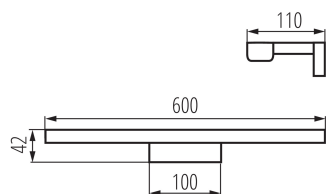


Ambient temperature range to which the product can be exposed: 5÷30

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 0,75÷1,5

IP class: 44

Kształt: rectangular

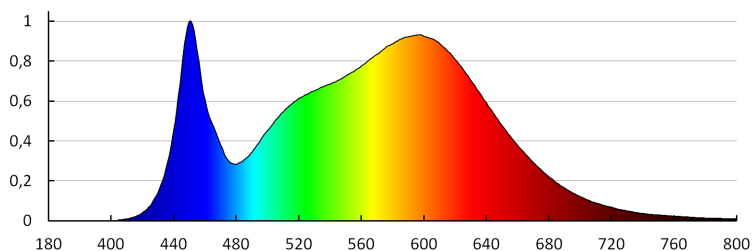

KANLUX S.A. (kat 26684) ASTEN IP44 12W-NW-B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 26684) ASTEN IP44 12W-NW-B
Lamps: 1 x ASTEN 12W

