


28440 AL 4LED 60-MPR-W-NT

T8 LED tube linear fittings



GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Replaceable light source: yes

Light source included: no

Fixture lighting direction: down

Power supply of T8 LED fluorescent lamps: Unilateral

Length [mm]: 630

Width [mm]: 60

Height [mm]: 69

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 18

Class of protection against electric shock: I

Lampshade material: plastic

Light source: T8 LED

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: microprismatic


The fixture is adapted to the light sources of the following energy classes: A++,A+,A

Enclosure material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

IP class: 20

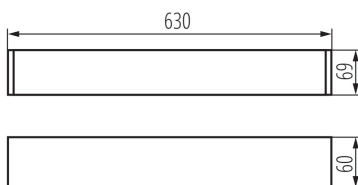

Date of issue: 08.09.2020, 11:37

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.