





## 28457 AL 4LED 150-MPR-SR

T8 LED tube linear fittings



### GENERAL DATA:

**Colour:** silver

**Place of assembly:** for suspension on the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Replaceable light source:** yes

**Light source included:** no

**Fixture lighting direction:** down

**Power supply of T8 LED fluorescent lamps:** Unilateral

**Length [mm]:** 1540

**Width [mm]:** 60

**Height [mm]:** 69

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** max 58

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Light source:** T8 LED

**Cap:** G13

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** microprismatic

**The fixture is adapted to the light sources of the following energy classes:** A++, A+, A

**Enclosure material:** aluminum alloy

**Connection type:** Self-clamping block

**Range of sections of wires used [mm²]:** 1,5÷2,5

**IP class:** 20



Date of issue: 08.09.2020, 11:34

We reserve the right to make technical changes. The data contained in this material are not legally binding.


Photometry: the results obtained from testing were from a specific sample.

## 28457 AL 4LED 150-MPR-SR

T8 LED tube linear fittings


KANLUX S.A. (kat 28457) AL 4LED 150-MPR-SR + GLASSv3 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28457) AL 4LED 150-MPR-SR + GLASSv3  
Lamps: 1 x T8 LED GLASSv3 24W-CW

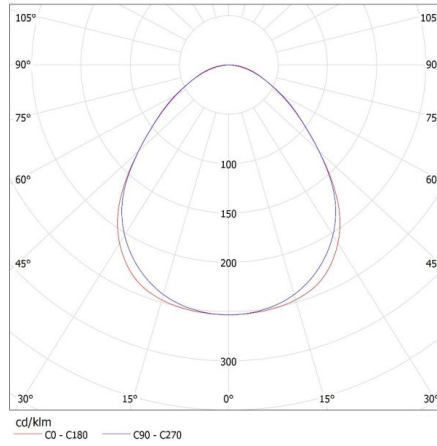

KANLUX S.A. (kat 28457) AL 4LED 150-MPR-SR + GLASSv2 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28457) AL 4LED 150-MPR-SR + GLASSv2  
Lamps: 1 x T8 LED GLASSv2 24W-NW

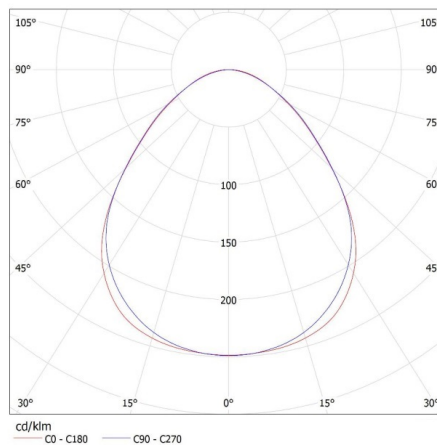

## 28457 AL 4LED 150-MPR-SR

T8 LED tube linear fittings

KANLUX S.A. (kat 28457) AL 4LED 150-MPR-SR + Miledo / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28457) AL 4LED 150-MPR-SR + Miledo  
Lamps: 1 x T8 LED 22W-NW

