29382 AL 17W-830-MAT-B-NT

Linear LED luminaire

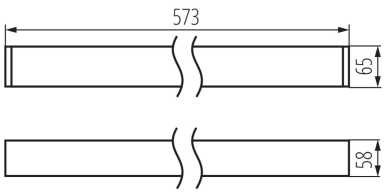

GENERAL DATA:

Colour: black
Place of assembly: ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Replaceable light source: no
Fixture lighting direction: down
Length [mm]: 573
Width [mm]: 58
Height [mm]: 65
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 17
Class of protection against electric shock: I
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 1440
Colour temperature: Warm white
Colour temperature [K]: 3000
Colour uniformity [SDCM]: ≤6
Colour-rendering index Ra: ≥80
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L80B10
Number of on/off cycles: ≥30000
Lighting angle [°]: X85/Y95
Luminous efficiency of the lamp [lm/W]: 85
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: matt
Enclosure material: aluminum alloy
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5÷2,5
The fixture set includes built-in LED's with the following energy classes: A++,A+,A
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 20

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

29382 AL 17W-830-MAT-B-NT

Linear LED luminaire

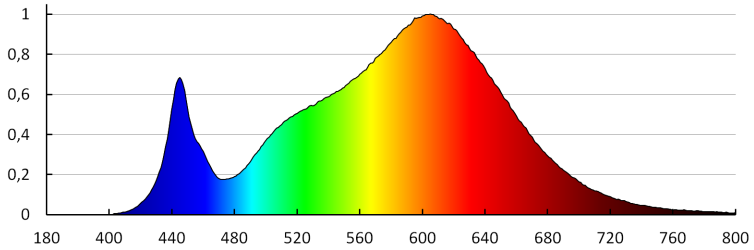

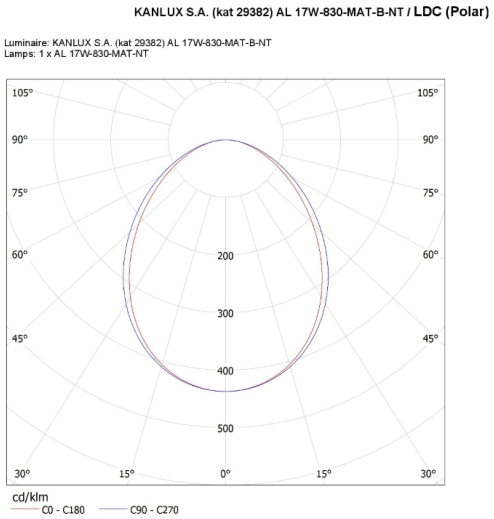

ACCESSORIES:

32540 ALIN CORD 1F-W

Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm

32541 ALIN CORD 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm

Date of issue: 08.09.2020, 12:19

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

29382 AL 17W-830-MAT-B-NT

Linear LED luminaire

32542 ALIN CORD 1F-SR

Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm

07871 ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

29557 ALIN NT GRIP

Wall bracket for the ALIN luminaire, 2 pcs included

27109 KLOSZ MPR AL 11W/17W

MPR shade for fitting ALIN, MPR SHADE AL 11W/17W,(27109)

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN