
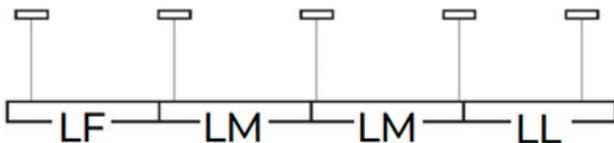



### Linear LED luminaire

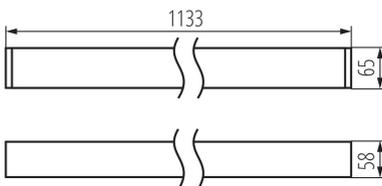

#### GENERAL DATA:

**Colour:** white  
**Place of assembly:** ceiling mounted  
**Place of application:** Indoors  
**Minimum distance from the illuminated object:** 0,5m  
**Compatible with a dimmer:** no  
**Replaceable light source:** no  
**Fixture lighting direction:** down  
**Length [mm]:** 1133  
**Width [mm]:** 58  
**Height [mm]:** 65  
**Integrated LED light source:** yes  
**Version for connection in line [initial element]:** 32223 (NT), 32031 (Z)  
**Version for connection in line [central element]:** 32247 (NT), 32055 (Z)  
**Version for connection in line [final element]:** 32271 (NT), 32079 (Z)  
**Explanation of markings and signs used:** (NT) - ceiling mounted, (Z) - for suspension on the ceiling


#### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 33  
**Class of protection against electric shock:** I  
**Lampshade material:** plastic  
**Diode type:** LED SMD  
**Luminous flux [lm]:** 2830  
**Colour temperature:** white  
**Colour temperature [K]:** 4000  
**Colour uniformity [SDCM]:** ≤6  
**Colour-rendering index Ra:** ≥80  
**Service life [h]:** 50000  
**Luminous-flux-retention factor at the end of rated service life:** L80B10  
**Number of on/off cycles:** ≥30000  
**Lighting angle [°]:** X75/Y90  
**Luminous efficiency of the lamp [lm/W]:** 86  
**Ambient temperature range to which the product can be exposed:** 5÷25  
**Shade type:** microprismatic  
**Enclosure material:** aluminum alloy  
**Connection type:** Self-clamping block  
**Range of sections of wires used [mm<sup>2</sup>]:** 1,5÷2,5  
**The fixture set includes built-in LED's with the following**

**energy classes:** A++,A+,A  
**Lamp-heating time [s]:** ≤1  
**Lamp-ignition time [s]:** ≤0,5  
**IP class:** 20


### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

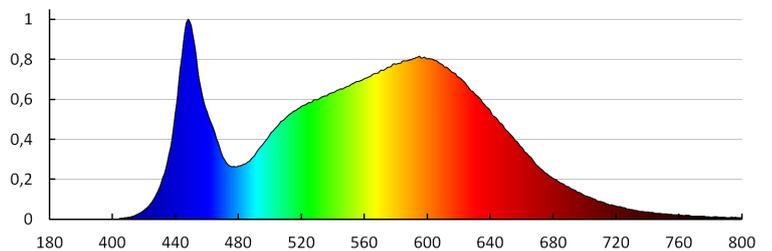

KANLUX S.A. (kat 29451) AL 33W-840-MPR-W-NT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 29451) AL 33W-840-MPR-W-NT  
Lamps: 1 x AL 33W-840-MPR-NT

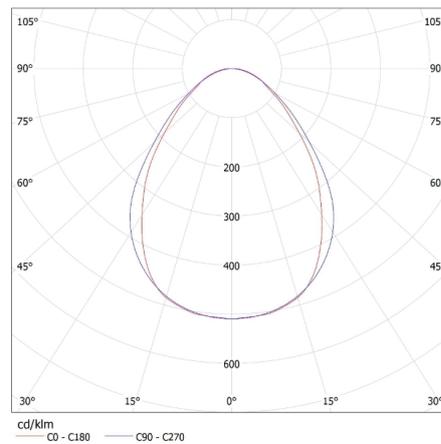

### ACCESSORIES:

**32540** ALIN CORD 1F-W

Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm



**32541** ALIN CORD 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm

### Linear LED luminaire



**32542** ALIN CORD 1F-SR

Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm



**07871** ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set



**29557** ALIN NT GRIP

Wall bracket for the ALIN luminaire, 2 pcs included



**25979** KLOSZ MPR AL 23W/33W

MPR shade for fitting ALIN, MPR SHADE AL 23W/33W,(25979)

