



## 29641 XLED C35T 2,5W-SW

LED light source

**1800K**  
SUPER  
WARM



DE  
CO  
RI  
function

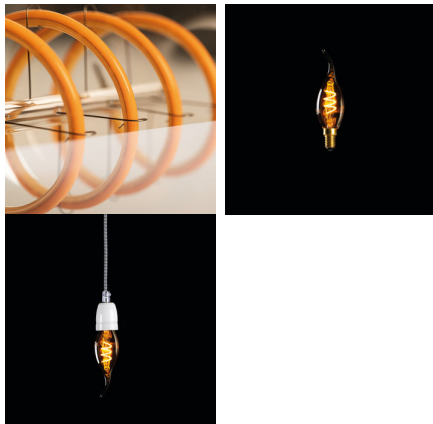

A decorative version of a bulb in the shape of a candle. Kanlux XLED C35T in this exceptional version will help you create a very cosy atmosphere. All thanks to a very warm colour of the light and an amber glass in which a spiral LED filament is enclosed. This bulb will look beautiful in table lamps, floor lamps or hanging lamps with an open lampshade. It will be a true decoration of our house, café table or a restaurant's chandelier, as well as suspension lamps without lampshades. It is an exceptional combination of a decorative nature, vintage style and modern energy-efficient LED technology.

### GENERAL DATA:

**Colour:** amber

**Lamp designed for decorative lighting:** Not applicable

**Compatible with a dimmer:** no

**Height [mm]:** 123

**Diameter [mm]:** 35

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Lamp-power factor:** 0.5

**Rated power [W]:** 2.5

**Lampshade material:** glass

**Light source:** C35

**Diode type:** LED FILAMENT

**Total rated luminous flux [lm]:** 135

**Colour temperature:** super warm

**Colour temperature [K]:** 1800

**Colour uniformity [SDCM]:** ≤6

**Colour-rendering index Ra:** ≥80

**Rated lamp-service life [h]:** 15000

**Number of on/off cycles:** ≥15000

**Rated beam angle [°]:** 320

**Rated light level [°]:** 320

**Light source EEL:** A+

**Lamp rated current [mA]:** 19

**Annual power consumption [kWh/1000h]:** 3

**Luminous efficiency of the lamp [lm/W]:** 54

**Ignition time [s]:** ≤0,5

**Lamp-heating time to 60% of the full luminous flux [s]:**  
Negligible

**Lamp-heating time to 95% [s]:** <2

**Lamp premature-failure indicator:** <5% po 1000h

## 29641 XLED C35T 2,5W-SW

---

LED light source

**Lamp service life factor after the period of 6000h [%]:**  
≥90

**Luminous flux retention factor at the end of rated service life [%]:** ≥70

**Luminous flux retention factor after the period of 6000h [%]:** ≥80

**Declaration of equality in power rating [W]:** 15

**Light source shape:** swieczka