


32520 TONIL LED B

LED wall mounted fitting



Kanlux TONIL LED is a wall lamp modest in shape with an integrated source of light. Its elastic rubber arm makes it possible to direct light to a desired direction, at the same time giving an even shape to the fitting.

GENERAL DATA:


Colour: black
Place of assembly: wall mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,2m
Compatible with a dimmer: no
On switch: yes
Length [mm]: 370
Width [mm]: 51
Height [mm]: 121
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 2,7
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 100
Colour temperature: Warm white
Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80
Service life [h]: 20000
Number of on/off cycles: ≥15000
Lighting angle [°]: 30
Luminous efficiency of the lamp [lm/W]: 37
Ambient temperature range to which the product can be exposed: 5÷25
Enclosure material: aluminum alloy
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 0,5-1,5
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
The fixture is movable horizontally [°]: 360
The fixture is movable vertically [°]: 360
IP class: 20

32520 TONIL LED B

LED wall mounted fitting

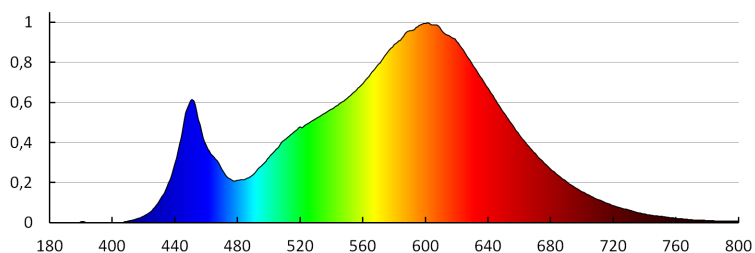

KANLUX S.A. (kat 32520) TONIL LED B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 32520) TONIL LED B
Lamps: 1 x TONIL LED B

