


Ceiling-mounted LED light fitting

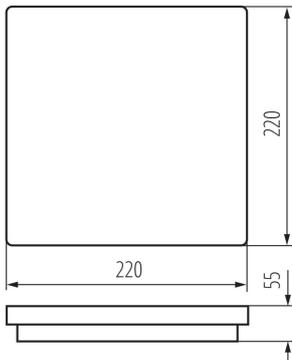

Kanlux BENO luminaries that's unique design and unique light effect. They were created on the basis of individual order of Kanlux, and their designs were registered by us at the patent office. Kanlux BENO LED also provides high weather resistance (IP54), quick and easy installation on the ceiling or wall, and Beno is equipped with the adjustable movement sensor. Kanlux BENO LED is a multifunctional fitting, which due to its design and its technical aspects, we can apply practically anywhere.

GENERAL DATA:

Colour: graphite
Place of assembly: wall mounted, ceiling mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Replaceable light source: no
Length [mm]: 220
Width [mm]: 220
Height [mm]: 55
Diameter [mm]: 220
Integrated LED light source: yes


TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 18
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 1550
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Service life [h]: 20000
Number of on/off cycles: ≥ 20000
Lighting angle [°]: 110
Luminous efficiency of the lamp [lm/W]: 86
Ambient temperature range to which the product can be exposed: -15÷35
Enclosure material: plastic
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 0,5÷1,5
The fixture set includes built-in LED's with the following energy classes: A++,A+,A

32943 BENO 18W NW-L-GR

Ceiling-mounted LED light fitting

Lamp-heating time [s]: ≤ 1
Lamp-ignition time [s]: $\leq 0,5$
IP class: 54

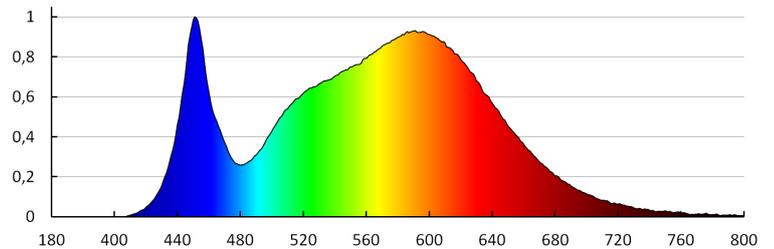

KANLUX S.A. (kat 32943) BENO 18W NW-L-GR / LDC (Polar)

Luminaire: KANLUX S.A. (kat 32943) BENO 18W NW-L-GR
Lamps: 1 x BENO 18W NW

