

33169 TP STRONG LED 60W-NW

Linear LED luminaire



up to
135 $\frac{\text{lm}}{\text{W}}$



GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted, wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Possibility of fixture-loop-through connection: yes

Compatible with a dimmer: no

Length [mm]: 1550

Width [mm]: 67

Height [mm]: 60

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Power factor: 0.95

Maximum power [W]: 60

Class of protection against electric shock: I

Lampshade material: PC

Diode type: LED SMD

Luminous flux [lm]: 8000

Useful luminous flux of the light source Φ_{use} [lm]: 9500

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L70B50


Number of on/off cycles: ≥ 30000

Lighting angle [°]: X125/Y110

Luminous efficiency of the lamp [lm/W]: 133

33169 TP STRONG LED 60W-NW

Linear LED luminaire

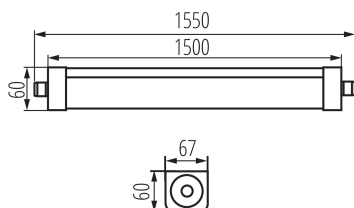

Ambient temperature range to which the product can be exposed: -20÷40

Enclosure material: plastic

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

Lamp-heating time [s]: <1

Lamp-ignition time [s]: ≤0,5


IK class: 08

IP class: 65

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

•

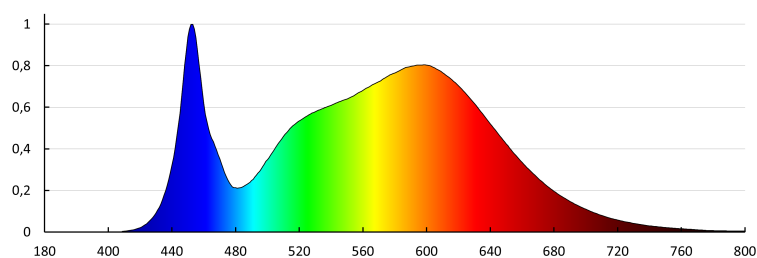

KANLUX S.A. (kat 33169) TP STRONG LED 60W-NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 33169) TP STRONG LED 60W-NW
Lampa: 1 x TP STRONG LED 60W

