

33181 BLINGO IPR 38W 6060NW

Recessed-mounted LED panel



Kanlux BLINGO LED are backlite panels equipped with lenses that extend

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer : no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 35

Integrated LED light source : yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 38

Class of protection against electric shock : II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3800

Useful luminous flux of the light source Φ_{use} [lm] : 4940

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses : ≤ 6

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life : L70B50

Number of on/off cycles : ≥ 30000

Lighting angle [°]: 120

Luminous efficiency of the lamp [lm/W]: 100



Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Panel/frame material: steel

Connection type: Terminal block

Power-supply type: direct current

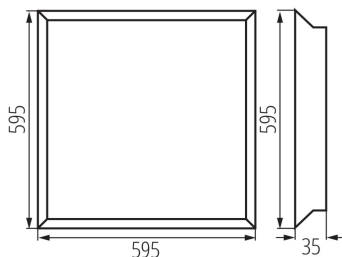

33181 BLINGO IPR 38W 6060NW

Recessed-mounted LED panel


Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

IP class: 44/20


ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

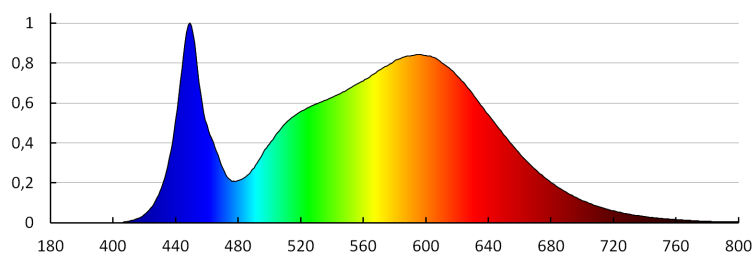

KANLUX S.A. (kat 33181) BLINGO IPR 38W 6060NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33181) BLINGO IPR 38W 6060NW
Lamps: 1 x BLINGO IPR 38W 6060NW

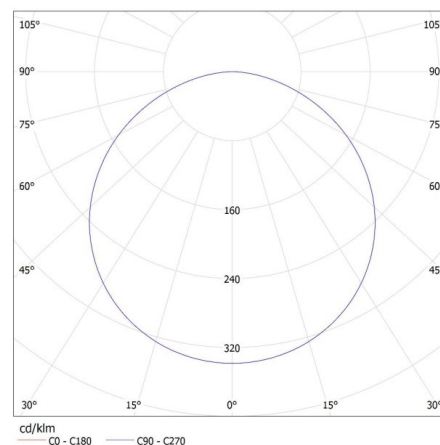

ACCESSORIES

28515

BLINGO DALI SET 38W

Set containing accessories and a power supply unit enabling communication in line with DALI protocol (28515)

