

38385 BENO E 30W CCT O B

Ceiling-mounted LED light fitting

IP
65

CCT



Discover Kanlux BENO ECO modern ceiling lamps in a classic design.

Made of polypropylene (PP), the ceiling lamp is distinguished by its exceptional luminous efficiency, reaching 115 lm/W, which ensures excellent lighting with low energy consumption. Kanlux BENO ECO is available in a round version in the following power outputs: 12W, 20W, 30W and 40W. The elegant white or black matt color version makes the ceiling lamp fit perfectly into any interior, and thanks to the IP65 protection class, BENO ECO is resistant to dust and moisture, making it an ideal solution for both indoor and outdoor applications. The ceiling lamp is equipped with a steel mounting adapter and a quick connector, which makes installation easier and faster. Additionally, the ability to select the color temperature using the "DIP-switch" inside the junction box allows you to easily adjust the lighting to your individual preferences.

GENERAL DATA:

Colour: black

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Motion detection: no

Height [mm]: 55

Diameter [mm]: 300

Integrated LED light source: yes

Number of modules (LED light source): 1

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 30

Class of protection against electric shock: II

Lampshade material: PP

Enclosure material: PP


Diode type: LED SMD

Luminous flux of the light fitting [lm]: 2150 (WW) / 2400 (NW) / 2300 (CW)

Useful luminous flux of the light source Φ_{use} [lm]: 3850

38385 BENO E 30W CCT O B

Ceiling-mounted LED light fitting



Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Colour temperature: warm white, white, cold white

Correlated colour temperature [K] : 3000/4000/6500

Colour consistency in McAdam ellipses : 6

Colour rendering index : 80

Service life [h] : 30000

Number of on/off cycles : ≥ 30000

Lighting angle [°] : 110


Ambient temperature range to which the product can be exposed : -20÷45

Connection type: Self-clamping block

Range of sections of wires used [mm²] : 0,5÷1,5

IP class: 65

Shape: round

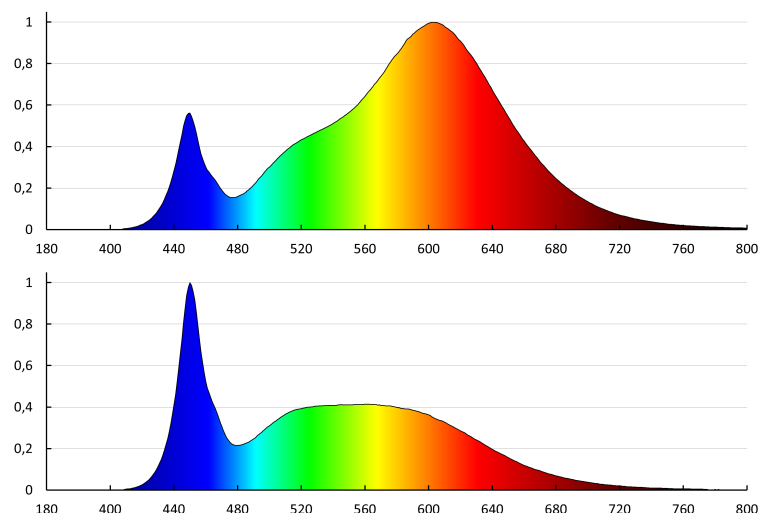

38385 BENO E 30W CCT O B

Ceiling-mounted LED light fitting

KANLUX S.A. (kat 38385) BENO ECO 30W CCT O B 6500K / Krzywa rozsyłu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 38385) BENO ECO 30W CCT O B 6500K
Lampy: 1 x BENO ECO 30W CCT O 6500K

