

## 38422 FL AGOR PRO 200W NW

LED floodlight



Kanlux AGOR PRO floodlights are a modern and durable lighting solution, ideal for areas such as sports facilities, production halls or facades of industrial or warehouse buildings. They are available in three power ratings: 100W, 150W and 200W and in symmetrical (140 lm/W) and asymmetrical (135 lm/W) versions. Thanks to the IP65 tightness class and IK08 durability, they effectively resist external factors. Solid construction made of cast aluminum, reinforced radiator and angle adjustment up to 270° ensure long life and versatility. They operate in 4000K color and are covered by a 5-year warranty. Accessories in the form of a protective grid are available.

### GENERAL DATA:


**Colour:** black  
**Place of assembly:** ceiling mounted, wall mounted  
**Place of application:** for industrial applications  
**Minimum distance from the illuminated object:** 1m  
**Compatible with a dimmer:** no  
**Wykrywanie ruchu:** no  
**Width [mm]:** 346  
**Height [mm]:** 387  
**Depth [mm]:** 98  
**Mercury content in the lamp [mg]:** 0  
**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 200  
**Class of protection against electric shock:** I  
**Lampshade material:** Tempered glass  
**Diode type:** LED SMD  
**Luminous flux [lm]:** 28000  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 33810  
**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** w szerokim stożku (120°)  
**Colour temperature:** white  
**Correlated colour temperature [K]:** 4000  
**Colour consistency in McAdam ellipses:** 6  
**Colour rendering index:**  $\geq 80$   
**Service life [h]:** 50000  
**Number of on/off cycles:**  $\geq 25000$

## 38422 FL AGOR PRO 200W NW

### LED floodlight

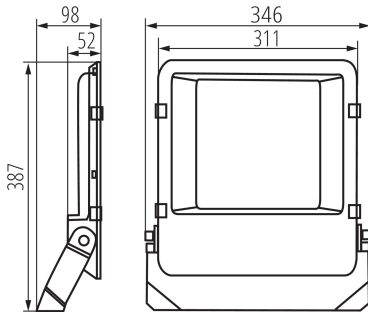

**Lighting angle [°]:** 110

**Luminous efficiency of the lamp [lm/W]:** 140

**Ambient temperature range to which the product can be exposed:** -30÷45

**Enclosure material:** Metal

**Connection type:** Free cable ends

**Wire type:** H05RN-F

**Wire length [m]:** 1

**Wire diameter [mm²]:** 1


**The fixture is movable vertically [°]:** 180

**IK class:** 08

**IP class:** 65


#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

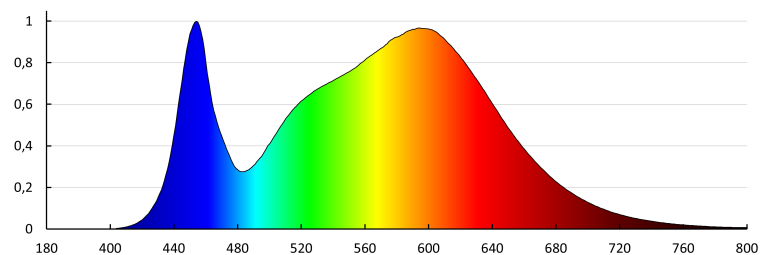

KANLUX S.A. (kat 38422) FL AGOR PRO 200W NW / Krzywa rozsyłu światła (biegunowo)



Oprawa: KANLUX S.A. (kat 38422) FL AGOR PRO 200W NW  
Lampy: 1 x FL AGOR PRO 200W

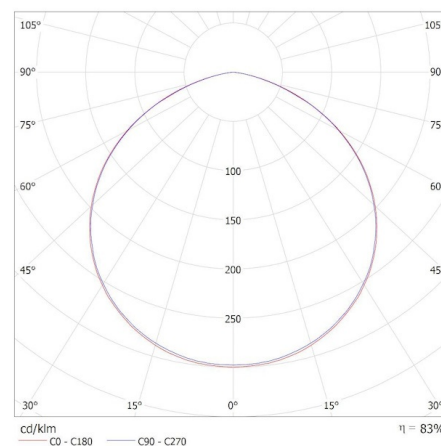

**38422 FL AGOR PRO 200W NW**

LED floodlight

**ACCESSORIES**

|                                                                                    |                       |                                                                                       |
|------------------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------|
| <b>38426</b>                                                                       | FL AGOR PRO GRID 100W | Protective grid for floodlight FL AGOR PRO 100W, FL AGOR PRO GRID 100W, black (38426) |
|   |                       |                                                                                       |
| <b>38427</b>                                                                       | FL AGOR PRO GRID 150W | Protective grid for floodlight FL AGOR PRO 150W, FL AGOR PRO GRID 150W, black (38427) |
|   |                       |                                                                                       |
| <b>38428</b>                                                                       | FL AGOR PRO GRID 200W | Protective grid for floodlight FL AGOR PRO 200W, FL AGOR PRO GRID 200W, black (38428) |
|  |                       |                                                                                       |