


38463 MAH MAX 19W 06 NW RYF

LED dustproof lighting fitting



up to
160 lm/W

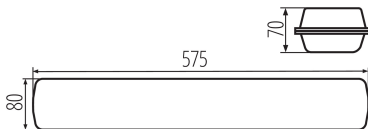

Kanlux MAH LED MAX is a hermetic fixture designed for demanding users. It is characterized by exceptional luminous efficacy: 160 lm/W. The Kanlux MAH LED MAX fixture is also easy, quick assembly (also thanks to quick connectors) and the possibility of connecting in lines. In Kanlux MAH LED MAX fixtures, we have used a grooved lampshade that increases the luminous flux. We emphasize the exceptional quality of this fixture with a 5-year warranty.

GENERAL DATA:

Colour: grey
Place of assembly: ceiling mounted, wall mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Possibility of fixture-loop-through connection: yes
Compatible with a dimmer: no
Length [mm]: 575
Width [mm]: 80
Height [mm]: 70
Number of chokes: 2
Mercury content in the lamp [mg]: 0
Integrated LED light source: yes
Number of modules (LED light source): 1

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Power factor: 0.95
Maximum power [W]: 19
Class of protection against electric shock: II
Lampshade material: PC
Enclosure material: PC
Diode type: LED SMD
Luminous flux [lm]: 3050
Useful luminous flux of the light source Φ_{use} [lm]: 3350
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: white
Correlated colour temperature [K]: 4000

38463 MAH MAX 19W 06 NW RYF

LED dustproof lighting fitting

Colour consistency in McAdam ellipses : 6

Colour rendering index: 80

Cap (Light source): solder pads

Service life [h]: 50000

Number of on/off cycles: ≥ 25000

Lighting angle [°]: 110

Luminous efficiency of the lamp [lm/W]: 161

Ambient temperature range to which the product can be exposed: -20÷40

Shade type: grooved

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1÷2,5


IK class: 08

IP class: 66

Kształt: rectangular

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

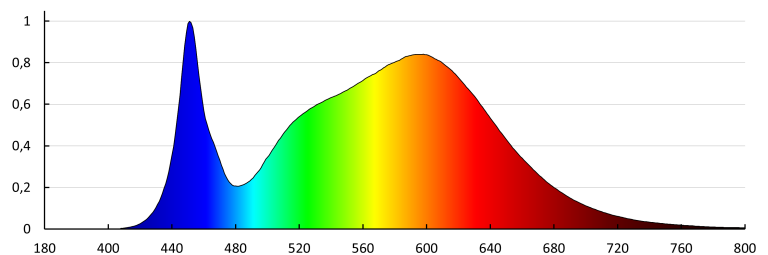


38463 MAH MAX 19W 06 NW RYF

LED dustproof lighting fitting

KANLUX S.A. (kat 38463) MAH MAX 19W 06 NW RYF / Krzywa rozsyłu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 38463) MAH MAX 19W 06 NW RYF
Lampy: 1 x MAH MAX 19W

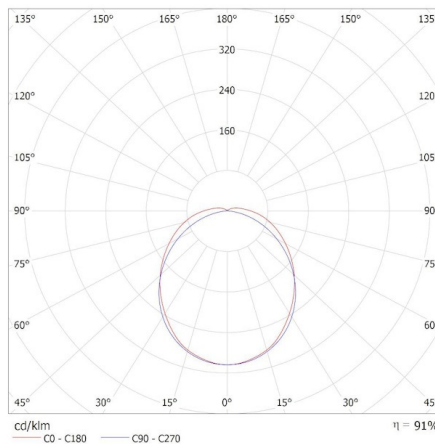

Date of issue: 25.11.2025, 08:45

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com