

OFIS S

Офис LED осветително тяло за открит монтаж



[V] 220-240 AC	[Hz] 50	≥30000	50000	ellipse ≤3x MacAdam	Ra 80	SMD
		IP 20		°C 5+25		
[mm²] 1,5+2,5	0,5m					




OS 40W-840-MPRM-B-N1

	[W]	[lm]	Tc [K]	TYPE	[°]	
OS 40W-840-MPRM-B-N1	32824	40	4200	4000	микропризматичен тип М	X95/Y95 черен
OS 40W-840-MPRM-B-N3	32825	40	4300	4000	микропризматичен тип М	X90/Y95 черен
OS 40W-840-MPRM-W-N1	32820	40	4500	4000	микропризматичен тип М	X95/Y95 бял
OS 40W-840-MPRM-W-N3	32821	40	4400	4000	микропризматичен тип М	X90/Y95 бял

- 5-годишна Гаранция при спазване на гаранционните условия, достъпни в уебсайта
- Материал на корпуса: метал
- Материал на дифузера: пластмаса

OFIS S

Офис LED осветително тяло за открит монтаж

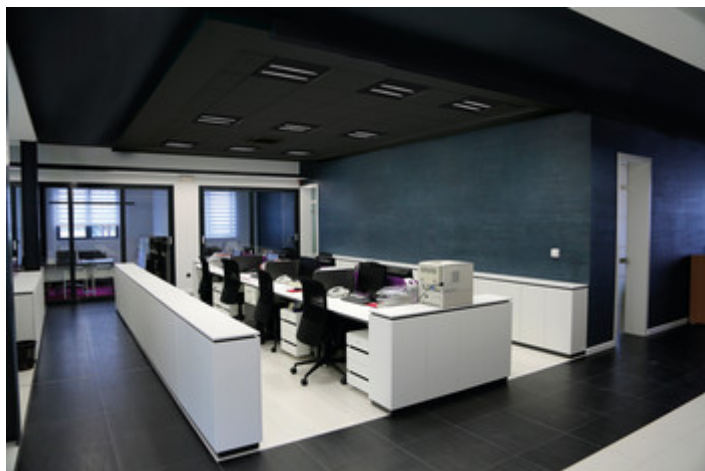

OS 40W-840-MPRM-B-N1




OS 40W-840-MPRM-B-N3




OS 40W-840-MPRM-W-N1




OS 40W-840-MPRM-W-N3

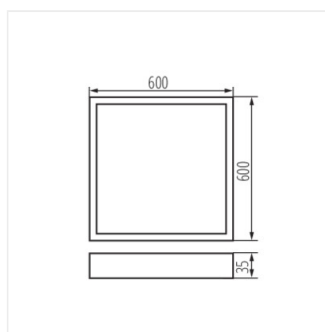


OS 40W-840-MPRM-B-N1

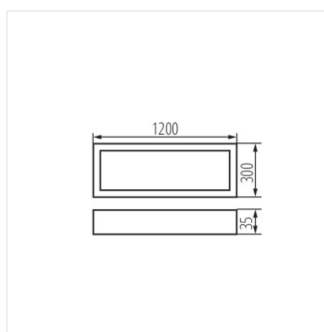

OS 40W-840-MPRM-B-N3

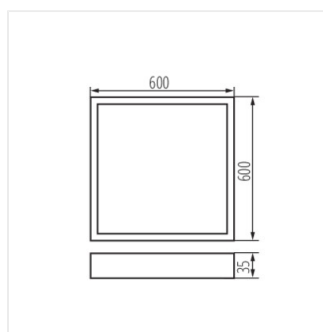

OS 40W-840-MPRM-W-N1



OS 40W-840-MPRM-W-N3