

## HIERRO

линейно LED осветително тяло



[V] 220-240 AC	[Hz] 50	$\geq 30000$	[h] 50000	ellipse $\leq 6^\circ$ MacAdam	Ra 80	SMD
		<b>IP</b> 20		[°C] 5÷25		
[mm <sup>2</sup> ] 1,5÷2,5		0,5m				



### HR-SL-WW-W-PT




	[W]	Tc [K]		[°]	[mm]	[mm]	[mm]	
HR-SL-WW-W-PT	<b>37024</b>	9	3000	растер	X60/Y60	бял	1150	315
HR-SH-WW-W-PT	<b>37025</b>	14	3000	растер	X60/Y60	бял	1650	315
HR-SL-WW-B-PT	<b>37032</b>	9	3000	растер	X60/Y60	черен	1050	315
HR-SH-WW-B-PT	<b>37033</b>	14	3000	растер	X60/Y60	черен	1450	315
HR-SL-WN-W-PT	<b>37040</b>	9	3500	растер	X60/Y60	бял	1200	315
HR-SH-WN-W-PT	<b>37041</b>	14	3500	растер	X60/Y60	бял	1700	315
HR-SL-WN-B-PT	<b>37048</b>	9	3500	растер	X60/Y60	черен	1050	315
HR-SH-WN-B-PT	<b>37049</b>	14	3500	растер	X60/Y60	черен	1500	315
HR-SL-NW-W-PT	<b>37056</b>	9	4000	растер	X60/Y60	бял	1250	315
HR-SH-NW-W-PT	<b>37057</b>	14	4000	растер	X60/Y60	бял	1700	315
HR-SL-NW-B-PT	<b>37064</b>	9	4000	растер	X60/Y60	черен	1100	315
HR-SH-NW-B-PT	<b>37065</b>	14	4000	растер	X60/Y60	черен	1550	315

- Материал на корпуса: стомана, пластмаса
- Материал на дифузера: пластмаса

## HIERRO

линейно LED осветително тяло

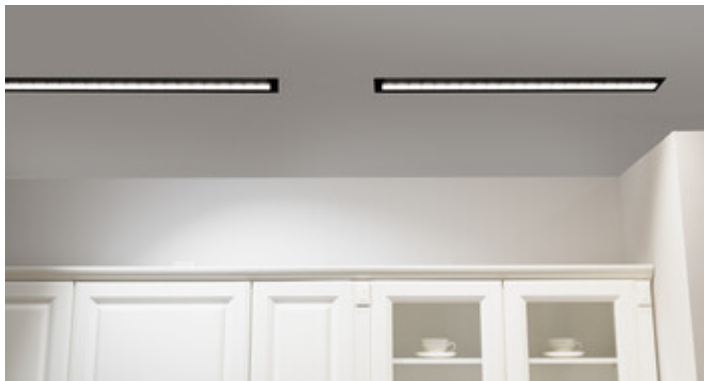

HR-SL-WW-W-PT



HR-SH-WW-W-PT



HR-SL-WW-B-PT



HR-SH-WW-B-PT



HR-SL-WN-W-PT



HR-SH-WN-W-PT



HR-SL-WN-B-PT



HR-SH-WN-B-PT



HR-SL-NW-W-PT



HR-SH-NW-W-PT




HR-SL-NW-B-PT



HR-SH-NW-B-PT

## HIERRO

линейно LED осветително тяло



HR-S-PT

