


Kanlux




Kanlux TALU IP44

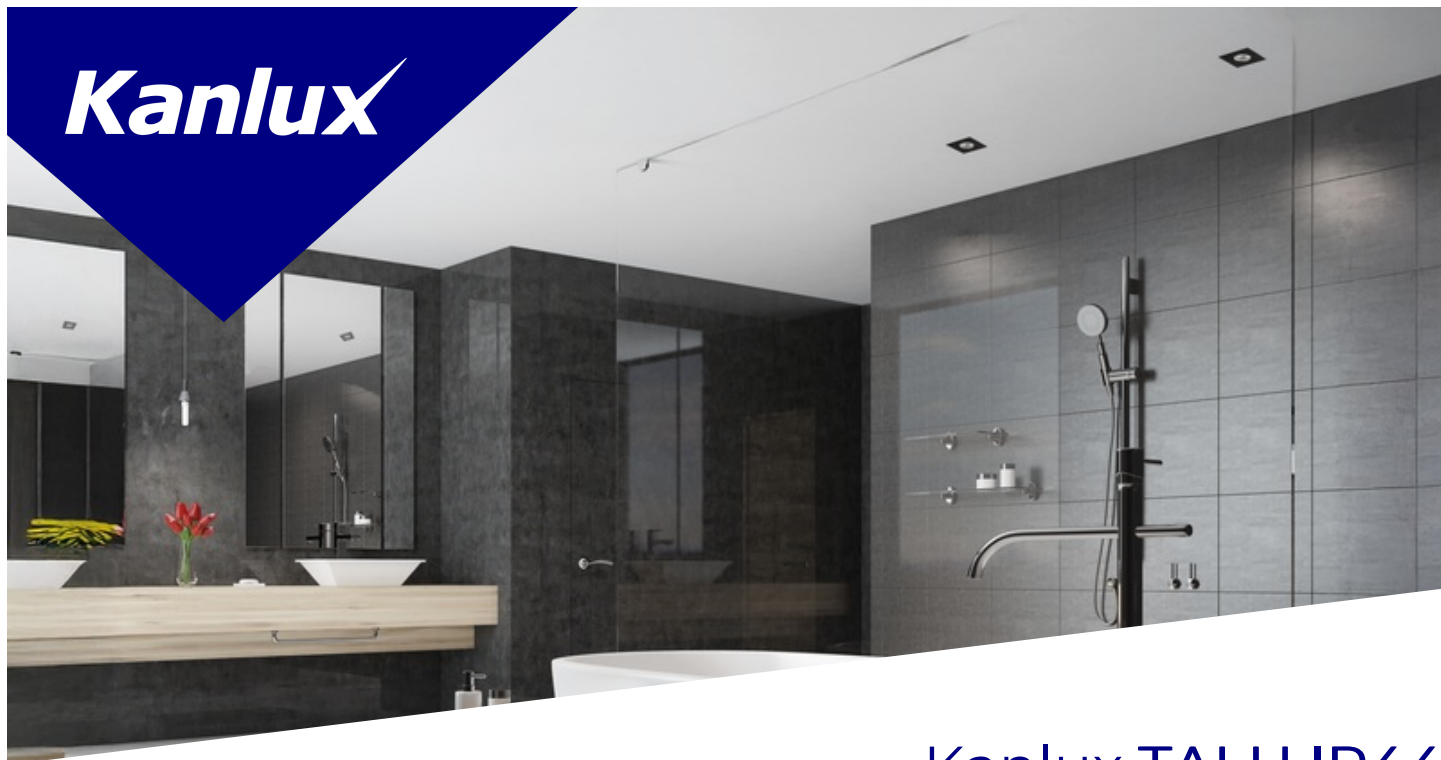

IP
44/20

 12 AC; 12 DC; 220-240 AC			 Gx5,3/GU10			IP 44/20
	 5÷25	 (mm) Ø60	 0,5m		 MR16/PAR16	
EAC	UK CA					



TALU IP44 DSO-W



TALU IP44 DSO-W	39540	max 10	бял	none
TALU IP44 DSO-B	39541	max 10	черен	none
TALU IP44 DSL-W	39542	max 10	бял	none
TALU IP44 DSL-B	39543	max 10	черен	none




TALU IP44 DSO-W




TALU IP44 DSO-B




TALU IP44 DSL-W




TALU IP44 DSL-B




TALU IP44 DSO-W



TALU IP44 DSO-B



TALU IP44 DSL-W



TALU IP44 DSL-B

Date of issue: 21.11.2025, 12:58

Запазва се правото за въвеждане на технически промени. Данните, съдържащи се в този материал, не са правно обвързващи.

Фотометрия: резултати, получени по време на изпитване на дадения екземпляр.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com