


Kanlux




Kanlux STONO TRK

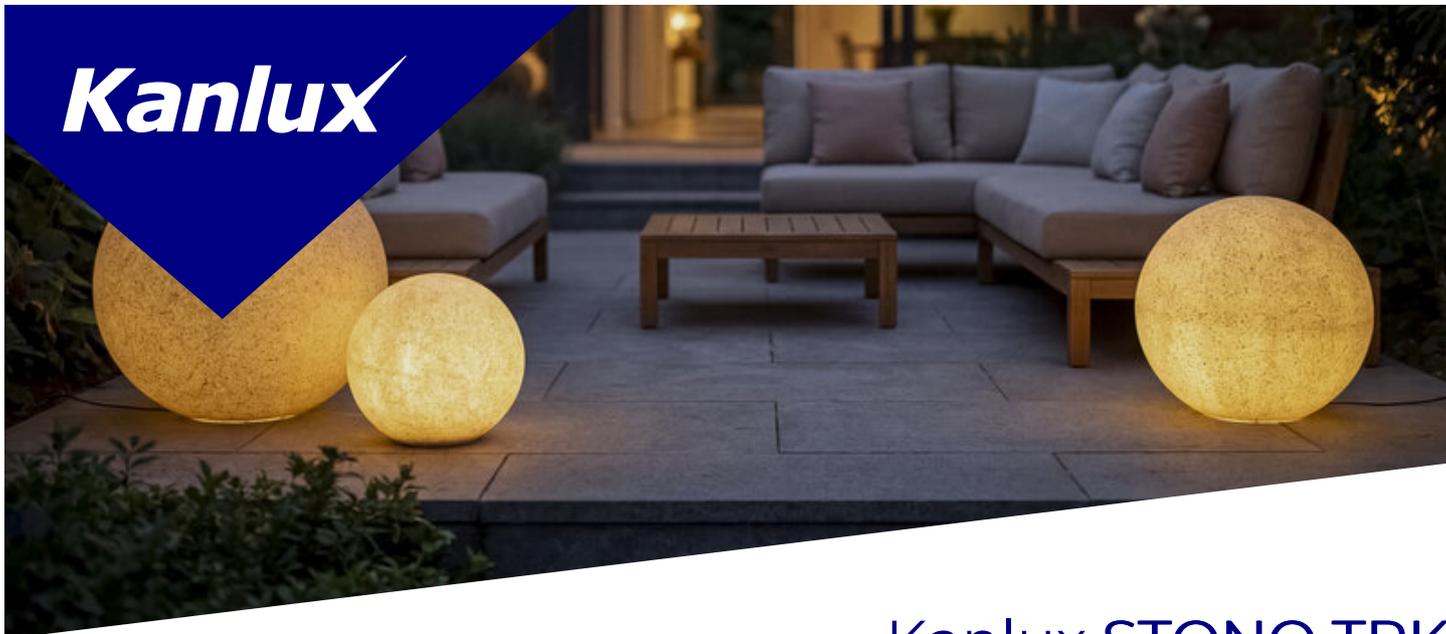

**IP
65**

[V] 220-240 AC	[Hz] 50					IP 65
	 -20÷35			[m] 3	[mm] 1	 0,2m
CE	ERC	UK CA				



STONO 20 TRK



Диаметър [mm]



Model	Code	max	mm	Material
STONO 20 TRK	45934	max 15	200	теракота
STONO 30 TRK	45935	max 20	300	теракота
STONO 40 TRK	45936	max 20	400	теракота
STONO 50 TRK	45937	max 20	500	теракота



STONO 20 TRK




STONO 30 TRK




STONO 40 TRK




STONO 50 TRK




STONO 20 TRK



STONO 30 TRK



STONO 40 TRK



STONO 50 TRK

Date of issue: 18.03.2026, 14:30

Запазва се правото за въвеждане на технически промени. Данните, съдържащи се в този материал, не са правно обвързващи.

Фотометрия: резултати, получени по време на изпитване на дадения екземпляр.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

