

KRD6-4

Proudový chránič, 4P



[Hz]

50

[mm²]

do 35

[°C]

-25÷40

IP

20

0000

4P

0

4

TH 35

Ui [V]

400

CE


EAC

VDE

UK

PA

↓

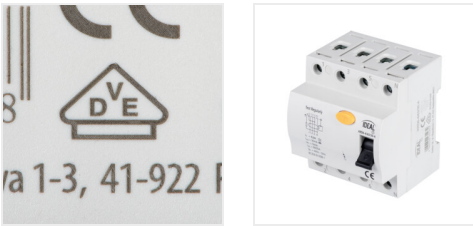

KRD6-4/63/30

	[V]	In [A]	Ian [mA]	Typ proudového chrániče		
KRD6-4/63/30	23185	400 AC	63	30	AC	4
KRD6-4/63/30-A	23193	400 AC	63	30	A	4
KRD6-4/100/30	23197	400 AC	100	30	AC	4
KRD6-4/100/30-A	23198	400 AC	100	30	A	4
KRD6-4/63/300	23201	400 AC	63	300	AC	4
KRD6-4/25/100	23205	400 AC	25	100	AC	4
KRD6-4/40/100	23206	400 AC	40	100	AC	4
KRD6-4/63/100	23207	400 AC	63	100	AC	4
KRD6-4/25/100-A	23227	400 AC	25	100	A	4
KRD6-4/40/100-A	23228	400 AC	40	100	A	4
KRD6-4/63/100-A	23229	400 AC	63	100	A	4

5 let záruky shodně s podmínkami záručního prohlášení dostupného na [internetové stránce](#)

Proudový chránič: slouží k dodatečné ochraně před úrazem elektrickým proudem, určen pro provoz v sinusových střídavých (typ AC) a sinusových střídavých a pulzních proudových obvodech s stejnosměrnou složkou (typ A).

KRD6-4

Proudový chránič, 4P



KRD6-4/63/30



KRD6-4/63/30-A



KRD6-4/100/30



KRD6-4/100/30-A



KRD6-4/63/300



KRD6-4/25/100



KRD6-4/40/100



KRD6-4/63/100



KRD6-4/25/100-A




KRD6-4/40/100-A




KRD6-4/63/100-A

KRD6-4


Proudový chránič, 4P




KRD6-4/63/30




KRD6-4/63/30-A




KRD6-4/100/30




KRD6-4/100/30-A




KRD6-4/63/300




KRD6-4/25/100




KRD6-4/40/100




KRD6-4/63/100



KRD6-4/25/100-A



KRD6-4/40/100-A



KRD6-4/63/100-A