


KSD

Přepětová ochrana

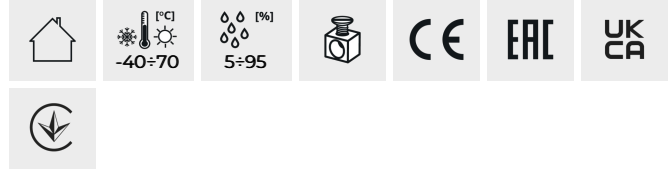

KSD-T2 275/40 1P

[V] **Typ ochrany**

KSD-T2 275/40 1P	23130	230 AC	1	T2 (C)
KSD-T2 275/40 M	23131	230 AC	1	T2 (C)
KSD-T2 275/120 3P	23132	230 AC	3	T2 (C)
KSD-T2 275/160 3P+N	23133	230 AC	4	T2 (C)
KSD-T1T2 275/240 3P+N	23920	230 AC	4	T1+T2 (B+C)
KSD-T1+T2 275/180 3P	23921	230 AC	3	T1+T2 (B+C)
KSD-T1T2 275/120 1P+N	23922	230 AC	2	T1+T2 (B+C)
KSD-T1+T2 275/60 1P	23923	230 AC	1	T1+T2 (B+C)
KSD-T1+T2 275/60 M	23924	230 AC	1	T1+T2 (B+C)

5 let záruky shodně s podmínkami záručního prohlášení dostupného na [internetové stránce](#)

Varistorová přepětová ochrana slouží k ochraně instalací NN před účinky indukovaných a spínacích přepětí v objektech bez systému ochrany před bleskem a s připojením kabelového vedení.

Dokument vytvořen: 30.09.2025, 06:45

Změna technický parametrů vyhrazena. Informace uvedené v tomto dokumentu nejsou právně závazné.

Fotometrie: výsledky získané během testování konkrétního exempláře.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

KSD

Přepětová ochrana



KSD-T2 275/40 1P



KSD-T2 275/40 M



KSD-T2 275/120 3P



KSD-T2 275/160 3P+N



KSD-TIT2 275/240 3P+N



KSD-TI+T2 275/180 3P



KSD-TIT2 275/120 1P+N




KSD-TI+T2 275/60 1P




KSD-TI+T2 275/60 M

KSD


Přepětová ochrana




KSD-T2 275/40 1P




KSD-T2 275/120 3P




KSD-T2 275/160 3P+N




KSD-TIT2 275/240 3P+N



KSD-T1+T2 275/180 3P



KSD-TIT2 275/120 1P+N



KSD-T1+T2 275/60 1P