



 220-240 AC	 50	 ≥30000	 50000	 ≤ 6x Nachglow	 Ra 80	 SMD
 DALI	 IP 20	 IP 20	 5÷25			
 0,5÷2,5	 0,5m	 CE	 UK CA			



KND-L6D-NW-B-P1




KND-L6D-NW-B-P1	37483	26	3600	4000	soczewka	60	černá
KND-L6D-NW-W-P1	37471	26	4100	4000	soczewka	60	bílá
KND-L6D-WW-B-P1	37477	26	3350	3000	soczewka	60	černá
KND-L6D-WW-W-P1	37465	26	3850	3000	soczewka	60	bílá
KND-L9D-NW-B-P1	37486	26	3550	4000	soczewka	90	černá
KND-L9D-NW-W-P1	37474	26	4050	4000	soczewka	90	bílá
KND-L9D-WW-B-P1	37480	26	3350	3000	soczewka	90	černá
KND-L9D-WW-W-P1	37468	26	3800	3000	soczewka	90	bílá




KN-B-P1



KN-W-P1



KN-P1

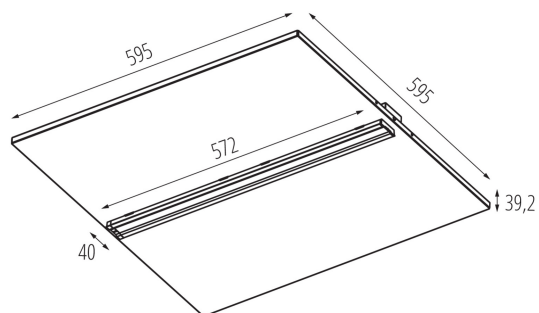

Dokument vytvořen: 01.10.2025, 06:21

Změna technický parametrů vyhrazena. Informace uvedené v tomto dokumentu nejsou právně závazné.

Fotometrie: výsledky získané během testování konkrétního exempláře.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

