



 220-240 AC	 50	 ≥30000	 50000	 Ra 80	 SMD
		 IP 20		 5÷25	
 1,5÷2,5	 0,5m				



KN-M6D-NW-B-P3




KN-M6D-NW-B-P3	37508	35	5250	4000	soczewka	60	černá
KN-M6D-NW-W-P3	37496	35	6000	4000	soczewka	60	bílá
KN-M6D-WW-B-P3	37502	35	4950	3000	soczewka	60	černá
KN-M6D-WW-W-P3	37490	35	5650	3000	soczewka	60	bílá
KN-M9D-NW-B-P3	37511	35	5100	4000	soczewka	90	černá
KN-M9D-NW-W-P3	37499	35	5850	4000	soczewka	90	bílá
KN-M9D-WW-B-P3	37505	35	4900	3000	soczewka	90	černá
KN-M9D-WW-W-P3	37493	35	5500	3000	soczewka	90	bílá




KN-B-P3



KN-W-P3



KN-P3

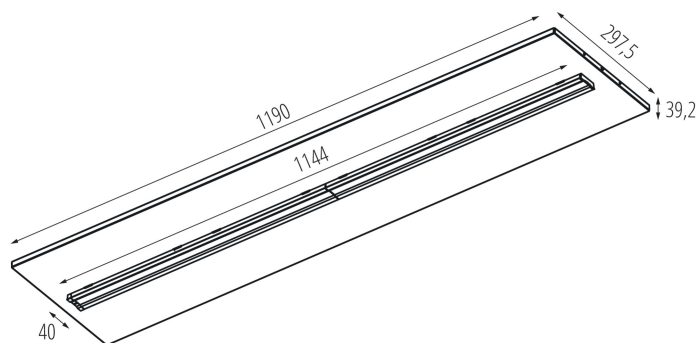

Dokument vytvořen: 01.10.2025, 06:25

Změna technický parametrů vyhrazena. Informace uvedené v tomto dokumentu nejsou právně závazné.

Fotometrie: výsledky získané během testování konkrétního exempláře.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

