



 220-240 AC	 50	 ≥30000	 50000	 ≤ 6x Nachglow	 80	 SMD
 DALI	 IP 20	 IP 20	 5÷25	 4	 Box	
 0,5÷2,5	 0,5m	 CE	 UK CA			



KND-S6D-NW-B-P3


KND-S6D-NW-B-P3	37530	19	2750	4000	soczewka	60	černá
KND-S6D-NW-W-P3	37518	19	3150	4000	soczewka	60	bílá
KND-S6D-WW-B-P3	37524	19	2600	3000	soczewka	60	černá
KND-S6D-WW-W-P3	37512	19	2950	3000	soczewka	60	bílá
KND-S9D-NW-B-P3	37533	19	2650	4000	soczewka	90	černá
KND-S9D-NW-W-P3	37521	18	3100	4000	soczewka	90	bílá
KND-S9D-WW-B-P3	37527	19	2550	3000	soczewka	90	černá
KND-S9D-WW-W-P3	37515	19	2850	3000	soczewka	90	bílá




KND-B-P3



KND-W-P3



KND-P3

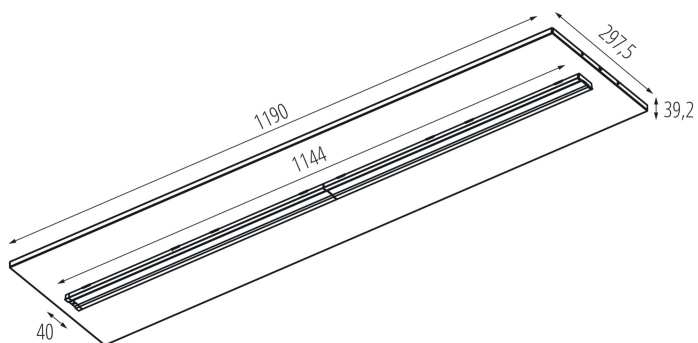

Dokument vytvořen: 01.10.2025, 06:25

Změna technický parametrů vyhrazena. Informace uvedené v tomto dokumentu nejsou právně závazné.

Fotometrie: výsledky získané během testování konkrétního exempláře.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

