

Kanlux

Kanlux ALIN IP55 LED



[V] 220-240 AC	[Hz] 50	 ≥30000	 50000	 ≤3x MacAdam	 Ra 80	 SMD
		IP 55		 -20÷35		
 0,5÷1	 0,5m	CE	ERC	UK CA		



AL55-MH-NW-MAT-W-NT

		 [m]	 [lm]	 Tc [K]	 TYPE	 [°]	
AL55-MH-NW-MAT-W-NT	38861	39,952	5300	4000	matná	X85/Y95	bílá
AL55-MH-WW-MAT-W-NT	38971	39,952	5050	3000	matná	X85/Y95	bílá
AL55-MH-NW-MAT-B-NT	38974	39,952	5300	4000	matná	X85/Y95	černá
AL55-MH-WW-MAT-B-NT	38977	39,952	5050	3000	matná	X85/Y95	černá
AL55-MH-NW-MPR-B-NT	39986	40	4900	4000	mikroprizmatický	X96/Y97	černá



AL55-MH-NW-MAT-W-NT




AL55-MH-WW-MAT-W-NT



AL55-MH-NW-MAT-B-NT



AL55-MH-WW-MAT-B-NT

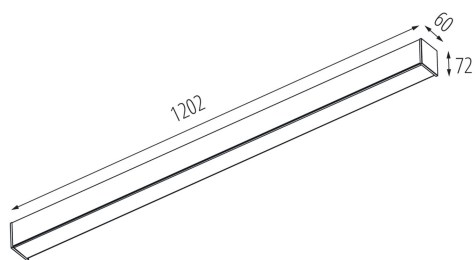

Dokument vytvořen: 01.10.2025, 14:20

Změna technický parametrů vyhrazena. Informace uvedené v tomto dokumentu nejsou právně závazné.

Fotometrie: výsledky získané během testování konkrétního exempláře.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

