


BENO LED

Ceiling-mounted LED light fitting



[V] 220-240 AC	[Hz] 50	[°] 110	≥20000	[h] 20000	Ellipse ≤ 6x Mackdam	Ra 80
Hg	SMD			IP 54		[°C] -15÷35
		[mm²] 0.5÷1.5	0,5m			

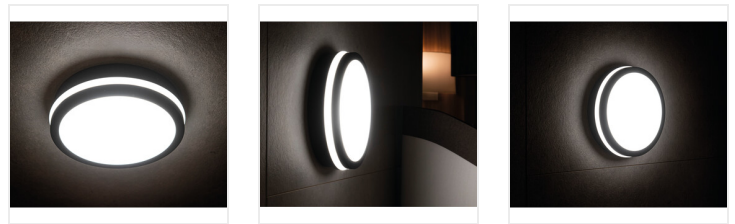

BENO 18W NW-O-W



	[W]	[lm]	Tc [K]		
BENO 18W NW-O-W	32940	18	1550	4000	white
BENO 18W NW-L-W	32942	18	1550	4000	white
BENO 18W NW-O-SE W	32944	18	1550	4000	white microwave
BENO 18W NW-L-SE W	32946	18	1550	4000	white microwave
BENO N 18W NW-O-SE GR	32948	18	1400	4000	graphite microwave
BENO N 18W NW-L-SE GR	32949	18	1400	4000	graphite microwave
BENO N 18W NW-O-GR	33348	18	1400	4000	graphite
BENO N 18W NW-L-GR	33349	18	1400	4000	graphite

Kanlux BENO luminaries that's unique design and unique light effect. They were created on the basis of individual order of Kanlux, and their designs were registered by us at the patent office. Kanlux BENO LED also provides high weather resistance (IP54), quick and easy installation on the ceiling or wall, and Beno is equipped with the adjustable movement sensor (in versions -SE). Kanlux BENO LED is a multifunctional fitting, which due to its design and its technical aspects, we can apply practically anywhere.

- Enclosure material: plastic
- Lampshade material: plastic

BENO LED

Ceiling-mounted LED light fitting



BENO 18W NW-O-W



BENO 18W NW-L-W



BENO 18W NW-O-SE W



BENO 18W NW-L-SE W




BENO N 18W NW-O-SE GR



BENO N 18W NW-L-SE GR




BENO N 18W NW-O-GR

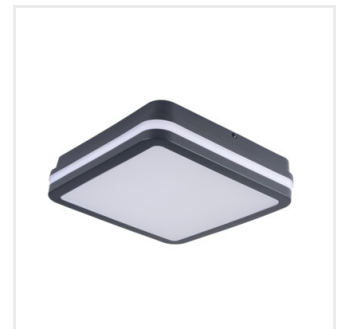


BENO N 18W NW-L-GR

BENO LED

Ceiling-mounted LED light fitting

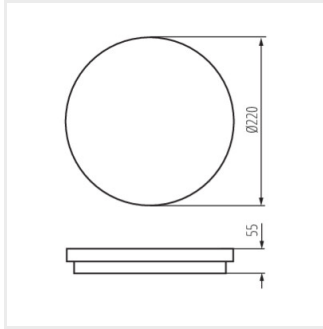

BENO 18W O

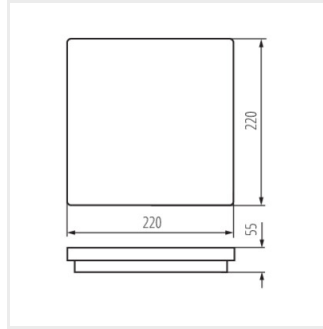

BENO 18W L