

A series of fixtures for professionals from the Kanlux Factory, which combines functionality and aesthetics. Thanks to very good lighting parameters, OFIS RST LED luminaires allow you to create energy-saving and modern lighting systems. The full picture of the product is complemented by the low UGR glare factor, which improves work comfort and visual effects.

- 5 years Warranty under the terms of the warranty statement, available on our website



 220-240 AC	 50	 ≥30000	 50000	 ≤3x MacAdam	 80	
		 IP 20		 5÷25		
 1.5÷2.5	 0,5m					



OS-H5D-NW-RST-B-P1




OS-H5D-NW-RST-B-P1	35968	49	5600	4000	louvre	50	black
OS-H5D-NW-RST-W-P1	35840	49	6300	4000	louvre	50	white
OS-H5D-WN-RST-B-P1	36144	49	5600	3500	louvre	50	black
OS-H5D-WN-RST-W-P1	36080	49	6300	3500	louvre	50	white
OS-H5D-WW-RST-B-P1	35952	49	5600	3000	louvre	50	black
OS-H5D-WW-RST-W-P1	35824	49	6300	3000	louvre	50	white
OS-H8D-NW-RST-B-P1	36000	49	5600	4000	louvre	80	black
OS-H8D-NW-RST-W-P1	35872	49	6300	4000	louvre	80	white
OS-H8D-WN-RST-B-P1	36160	49	5600	3500	louvre	80	black
OS-H8D-WN-RST-W-P1	36096	49	6300	3500	louvre	80	white
OS-H8D-WW-RST-B-P1	35984	49	5600	3000	louvre	80	black
OS-H8D-WW-RST-W-P1	35856	49	6300	3000	louvre	80	white
OS-L5D-NW-RST-B-P1	35960	31	3800	4000	louvre	50	black
OS-L5D-NW-RST-W-P1	35832	31	4300	4000	louvre	50	white
OS-L5D-WN-RST-B-P1	36136	31	3800	3500	louvre	50	black
OS-L5D-WN-RST-W-P1	36072	31	4300	3500	louvre	50	white
OS-L5D-WW-RST-B-P1	35944	31	3800	3000	louvre	50	black
OS-L5D-WW-RST-W-P1	35816	31	4300	3000	louvre	50	white
OS-L8D-NW-RST-B-P1	35992	31	3800	4000	louvre	80	black
OS-L8D-NW-RST-W-P1	35864	31	4300	4000	louvre	80	white
OS-L8D-WN-RST-B-P1	36152	31	3800	3500	louvre	80	black
OS-L8D-WN-RST-W-P1	36088	31	4300	3500	louvre	80	white
OS-L8D-WW-RST-B-P1	35976	31	3800	3000	louvre	80	black
OS-L8D-WW-RST-W-P1	35848	31	4300	3000	louvre	80	white
OS-M5D-NW-RST-B-P1	35964	39	4800	4000	louvre	50	black
OS-M5D-NW-RST-W-P1	35836	39	5400	4000	louvre	50	white
OS-M5D-WN-RST-B-P1	36140	39	4800	3500	louvre	50	black
OS-M5D-WN-RST-W-P1	36076	39	5400	3500	louvre	50	white
OS-M5D-WW-RST-B-P1	35948	39	4800	3000	louvre	50	black
OS-M5D-WW-RST-W-P1	35820	39	5400	3000	louvre	50	white
OS-M8D-NW-RST-B-P1	35996	39	4800	4000	louvre	80	black
OS-M8D-NW-RST-W-P1	35868	39	5400	4000	louvre	80	white
OS-M8D-WN-RST-B-P1	36156	39	4800	3500	louvre	80	black
OS-M8D-WN-RST-W-P1	36092	39	5400	3500	louvre	80	white
OS-M8D-WW-RST-B-P1	35980	39	4800	3000	louvre	80	black
OS-M8D-WW-RST-W-P1	35852	39	5400	3000	louvre	80	white
OS-S5D-NW-RST-B-P1	35956	22	2800	4000	louvre	50	black
OS-S5D-NW-RST-W-P1	35828	22	3200	4000	louvre	50	white
OS-S5D-WN-RST-B-P1	36132	22	2800	3500	louvre	50	black
OS-S5D-WN-RST-W-P1	36068	22	3200	3500	louvre	50	white
OS-S5D-WW-RST-B-P1	35940	22	2800	3000	louvre	50	black
OS-S5D-WW-RST-W-P1	35812	22	3200	3000	louvre	50	white
OS-S8D-NW-RST-B-P1	35988	22	2800	4000	louvre	80	black
OS-S8D-NW-RST-W-P1	35860	22	3200	4000	louvre	80	white
OS-S8D-WN-RST-B-P1	36148	22	2800	3500	louvre	80	black
OS-S8D-WN-RST-W-P1	36084	22	3200	3500	louvre	80	white
OS-S8D-WW-RST-B-P1	35972	22	2800	3000	louvre	80	black
OS-S8D-WW-RST-W-P1	35844	22	3200	3000	louvre	80	white




OS RST B P1



OS RST W P1



OS RST P1

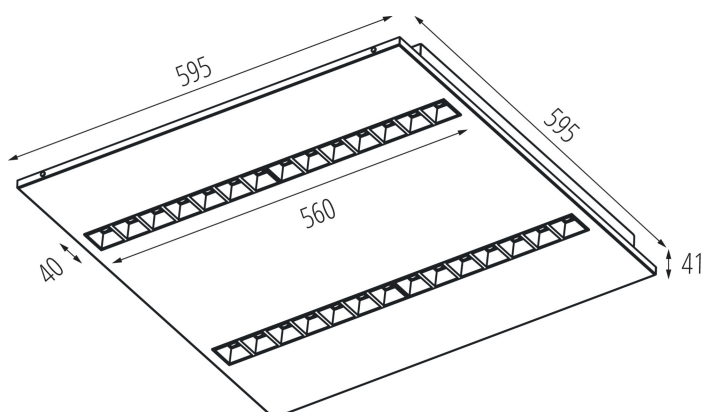

Date of issue: 21.03.2025, 13:50

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com