

A series of fixtures for professionals from the Kanlux Factory, which combines functionality and aesthetics. Thanks to very good lighting parameters, OFIS RST LED luminaires allow you to create energy-saving and modern lighting systems. The full picture of the product is complemented by the low UGR glare factor, which improves work comfort and visual effects.

- 5 years Warranty under the terms of the warranty statement, available on our website



 220-240 AC	 50	 ≥30000	 50000	 ≤3x MacAdam	 80	
		 IP 20		 5÷25		
 1.5÷2.5	 0,5m					



OS RST W N1




OS-S5D-WW-RST-W-N1	35810	22	3200	3000	louvre	50	white
OS-L5D-WW-RST-W-N1	35814	31	4300	3000	louvre	50	white
OS-M5D-WW-RST-W-N1	35818	39	5400	3000	louvre	50	white
OS-H5D-WW-RST-W-N1	35822	49	6300	3000	louvre	50	white
OS-S5D-NW-RST-W-N1	35826	22	3200	4000	louvre	50	white
OS-L5D-NW-RST-W-N1	35830	31	4300	4000	louvre	50	white
OS-M5D-NW-RST-W-N1	35834	39	5400	4000	louvre	50	white
OS-H5D-NW-RST-W-N1	35838	49	6300	4000	louvre	50	white
OS-S8D-WW-RST-W-N1	35842	22	3200	3000	louvre	80	white
OS-L8D-WW-RST-W-N1	35846	31	4300	3000	louvre	80	white
OS-M8D-WW-RST-W-N1	35850	39	5400	3000	louvre	80	white
OS-H8D-WW-RST-W-N1	35854	49	6300	3000	louvre	80	white
OS-S8D-NW-RST-W-N1	35858	22	3200	4000	louvre	80	white
OS-L8D-NW-RST-W-N1	35862	31	4300	4000	louvre	80	white
OS-M8D-NW-RST-W-N1	35866	39	5400	4000	louvre	80	white
OS-H8D-NW-RST-W-N1	35870	49	6300	4000	louvre	80	white
OS-S5D-WW-RST-B-N1	35938	22	2800	3000	louvre	50	black
OS-L5D-WW-RST-B-N1	35942	31	3800	3000	louvre	50	black
OS-M5D-WW-RST-B-N1	35946	39	4800	3000	louvre	50	black
OS-H5D-WW-RST-B-N1	35950	49	5600	3000	louvre	50	black
OS-S5D-NW-RST-B-N1	35954	22	2800	4000	louvre	50	black
OS-L5D-NW-RST-B-N1	35958	31	3800	4000	louvre	50	black
OS-M5D-NW-RST-B-N1	35962	39	4800	4000	louvre	50	black
OS-H5D-NW-RST-B-N1	35966	49	5600	4000	louvre	50	black
OS-S8D-WW-RST-B-N1	35970	22	2800	3000	louvre	80	black
OS-L8D-WW-RST-B-N1	35974	31	3800	3000	louvre	80	black
OS-M8D-WW-RST-B-N1	35978	39	4800	3000	louvre	80	black
OS-H8D-WW-RST-B-N1	35982	49	5600	3000	louvre	80	black
OS-S8D-NW-RST-B-N1	35986	22	2800	4000	louvre	80	black
OS-L8D-NW-RST-B-N1	35990	31	3800	4000	louvre	80	black
OS-M8D-NW-RST-B-N1	35994	39	4800	4000	louvre	80	black
OS-H8D-NW-RST-B-N1	35998	49	5600	4000	louvre	80	black
OS-S5D-WN-RST-W-N1	36066	22	3200	3500	louvre	50	white
OS-L5D-WN-RST-W-N1	36070	31	4300	3500	louvre	50	white
OS-M5D-WN-RST-W-N1	36074	39	5400	3500	louvre	50	white
OS-H5D-WN-RST-W-N1	36078	49	6300	3500	louvre	50	white
OS-S8D-WN-RST-W-N1	36082	22	3200	3500	louvre	80	white
OS-L8D-WN-RST-W-N1	36086	31	4300	3500	louvre	80	white
OS-M8D-WN-RST-W-N1	36090	39	5400	3500	louvre	80	white
OS-H8D-WN-RST-W-N1	36094	49	6300	3500	louvre	80	white
OS-S5D-WN-RST-B-N1	36130	22	2800	3500	louvre	50	black
OS-L5D-WN-RST-B-N1	36134	31	3800	3500	louvre	50	black
OS-M5D-WN-RST-B-N1	36138	39	4800	3500	louvre	50	black
OS-H5D-WN-RST-B-N1	36142	49	5600	3500	louvre	50	black
OS-S8D-WN-RST-B-N1	36146	22	2800	3500	louvre	80	black
OS-L8D-WN-RST-B-N1	36150	31	3800	3500	louvre	80	black
OS-M8D-WN-RST-B-N1	36154	39	4800	3500	louvre	80	black
OS-H8D-WN-RST-B-N1	36158	49	5600	3500	louvre	80	black




OS RST W N1



OS RST B N1



OS RST N1

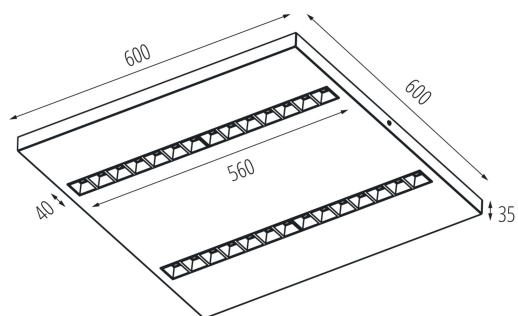

Date of issue: 21.03.2025, 13:45

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com