

Kanlux




Kanlux DABER CCT LED

DABER is a modern ceiling-mounted light fitting offering high durability and versatile functionality. It is characterized by an IP66 protection rating and IK10 impact resistance, ensuring reliability in demanding conditions. Adjustable power (8.5W–13W and 12.5W–20W) and colour temperatures (3000K / 3500K / 4000K) allow you to adjust the lighting to your needs. Luminous efficiency of up to 130 lm/W guarantee high energy efficiency. You can choose the version with a motion sensor, which can be controlled with a remote. We guarantee a 5-year warranty.



 [V] 220-240 AC	 [Hz] 50	 [°] 105	 ≥50000	 50000	 ≤ 6x MacAdam	 Ra 80
 Hg	 SMD	 IK 10	 IP 66	 -20÷35	 °C -20÷35	
 IK 10	 1÷1.5	 0,5m	 360° Øuse			



DABER 8-13W CCT W



DABER 8-13W CCT W	39020	8 / 13	max 1450 / 1460 / 1510	3000/3500/4000	white	
DABER 8-13W CCT SE W	39021	8 / 13	max 1450 / 1460 / 1510	3000/3500/4000	white	microwave
DABER 8-13W CCT B	39022	8 / 13	max 1420 / 1430 / 1490	3000/3500/4000	black	
DABER 8-13W CCT SE B	39023	8 / 13	max 1420 / 1430 / 1490	3000/3500/4000	black	microwave
DABER 12-20W CCT W	39024	12 / 20	max 2500 / 2530 / 2630	3000/3500/4000	white	
DABER 12-20W CCT SE W	39025	12 / 20	max 2500 / 2530 / 2630	3000/3500/4000	white	microwave
DABER 12-20W CCT B	39026	12 / 20	max 2450 / 2480 / 2560	3000/3500/4000	black	
DABER 12-20W CCT SE B	39027	12 / 20	max 2450 / 2480 / 2560	3000/3500/4000	black	microwave



DABER 8-13W CCT W



DABER 8-13W CCT SE W



DABER 8-13W CCT B



DABER 8-13W CCT SE B



DABER 12-20W CCT W




DABER 12-20W CCT SE W




DABER 12-20W CCT B




DABER 12-20W CCT SE B




DABER 8-13W CCT W




DABER 8-13W CCT SE W




DABER 8-13W CCT B




DABER 8-13W CCT SE B




DABER 12-20W CCT W



DABER 12-20W CCT SE W



DABER 12-20W CCT B



DABER 12-20W CCT SE B

DABER

DABER 8-13W CCT B								
150mA		180mA		220mA		250mA		
Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power	
3000K	900	8,5	1050	9,5	1270	11,5	1420	13,0
3500K	910		1060		1280		1430	
4000K	940		1100		1330		1490	

DABER 8-13W CCT W								
150mA		180mA		220mA		250mA		
Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power	
3000K	930	8,5	1090	9,5	1310	11,5	1450	13,0
3500K	940		1100		1320		1460	
4000K	970		1120		1360		1510	

DABER 12-20W CCT B								
150mA		180mA		220mA		250mA		
Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power	
3000K	1500	12,5	1780	15,0	2160	18,0	2450	20,0
3500K	1520		1810		2210		2480	
4000K	1600		1890		2290		2560	

DABER 12-20W CCT W								
150mA		180mA		220mA		250mA		
Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power	
3000K	1540	12,5	1810	15,0	2200	18,0	2500	20,0
3500K	1560		1860		2220		2530	
4000K	1640		1970		2350		2630	


DABER SE

DABER 8-13W CCT SE B								
150mA		180mA		220mA		250mA		
Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power	
3000K	900	8,5	1050	9,5	1270	11,5	1420	13,0
3500K	910		1060		1280		1430	
4000K	940		1100		1330		1490	

DABER 8-13W CCT SE W								
150mA		180mA		220mA		250mA		
Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power	
3000K	930	8,5	1090	9,5	1310	11,5	1450	13,0
3500K	940		1100		1320		1460	
4000K	970		1120		1360		1510	

DABER 12-20W CCT SE B								
150mA		180mA		220mA		250mA		
Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power	
3000K	1500	12,5	1780	15,0	2160	18,0	2450	20,0
3500K	1520		1810		2210		2480	
4000K	1600		1890		2290		2560	

DABER 12-20W CCT SE W								
150mA		180mA		220mA		250mA		
Lumen	Power	Lumen	Power	Lumen	Power	Lumen	Power	
3000K	1540	12,5	1810	15,0	2200	18,0	2500	20,0
3500K	1560		1860		2220		2530	
4000K	1640		1970		2350		2630	

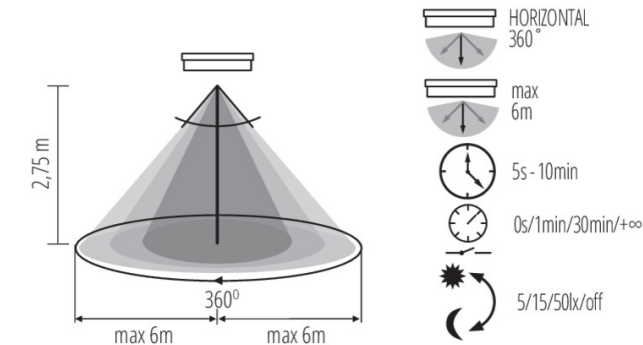

Date of issue: 28.07.2025, 12:20

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com