

Kanlux GIVRO LED is a safe and convenient light hose, and the way the sections are connected ensures reliability and comfort of use. Thanks to their high IP65 resistance, GIVRO hoses are protected against dust and moisture ingress, and their UV resistance guarantees long-lasting performance. Available in five lengths (5, 10, 15, 30, 50 m) and six colour versions – warm (3000 K), neutral (4000 K), cold (6500 K), as well as red, green and blue.

Kanlux GIVRO LED hoses can be connected together up to a length of 100 metres, and the loop-through power feed makes it easy to create large installations. If necessary, it can be cut, but only the plug-ended part is suitable for independent use, and the cut end should be secured with a GIVRO END CAP.

Additional accessories include the GIVRO-PR SET connection cable (150 cm, IP44, plug-ended) and the GIVRO-PR SETW/O PLUG (150 cm, IP65, without plug), GIVRO END CAP end caps and GIVRO HOLDER holders (10 pcs. per pack) for easy installation of the light hoses.

- The light hose/cord ends with a plug and a socket. Connect the plug of the light hose/cord to the PR-S [ET] power supply socket or to the socket of the section of the light hose/cord that is connected to the power supply. The loop-through power supply allows several GIVRO LED ropes of different lengths to be connected to each other. Seal any free socket of the hose/cord section not connected to another section with the provided plug. It is possible to create an installation of up to 100 metres long.
- The GIVRO LED rope light has designated cutting points every metre. The GIVRO LED rope can be cut, but the cut off part ending with a socket is not usable. Only the part ending with a plug can be used on its own; its cut end must be covered with the GIVRO END CAP.Do not connect cut sections of the rope light in any other way.
- For proper operation, the product requires the GIVRO PR SET power supply device (index 38590, 38593) available from Kanlux.

















GIVRO LED 5M-WW

		Pon	-\\.\chi- [lm]		IP	[mm]	Ei A
GIVRO LED 5M-WW	39190	1m = 2	1m = 110	Warm white	65	5000	G
GIVRO LED 5M-NW	39191	1m = 2	1m = 120	white	65	5000	G
GIVRO LED 5M-CW	39192	1m = 2	1m = 120	cold white	65	5000	G
GIVRO LED 5M-RE	39193	1m = 2	1m = 6	red	65	5000	
GIVRO LED 5M-GR	39194	1m = 2	1m = 29	green	65	5000	
GIVRO LED 5M-BL	39195	1m = 2	1m = 9,5	blue	65	5000	
GIVRO LED 10M-WW	38570	1m = 2	1m = 110	Warm white	65	10000	G
GIVRO LED 10M-CW	38571	1m = 2	1m = 120	cold white	65	10000	G
GIVRO LED 10M-NW	39196	1m = 2	1m = 120	white	65	10000	G
GIVRO LED 10M-RE	39197	1m = 2	1m = 6	red	65	10000	
GIVRO LED 10M-GR	39198	1m = 2	1m = 29	green	65	10000	
GIVRO LED 10M-BL	39199	1m = 2	1m = 9,5	blue	65	10000	
GIVRO LED 15M-WW	38572	1m = 2	1m = 110	Warm white	65	15000	G
GIVRO LED 15M-NW	38575	1m = 2	1m = 120	white	65	15000	G
GIVRO LED 15M-CW	38578	1m = 2	1m = 120	cold white	65	15000	G
GIVRO LED 15M-RE	38581	1m = 2	1m = 6	red	65	15000	
GIVRO LED 15M-GR	38584	1m = 2	1m = 29	green	65	15000	
GIVRO LED 15M-BL	38587	1m = 2	1m = 9,5	blue	65	15000	
GIVRO LED 30M-WW	38573	1m = 2	1m = 110	Warm white	65	30000	G
GIVRO LED 30M-NW	38576	1m = 2	1m = 120	white	65	30000	G
GIVRO LED 30M-CW	38579	1m = 2	1m = 120	cold white	65	30000	G
GIVRO LED 30M-RE	38582	1m = 2	1m = 6	red	65	30000	
GIVRO LED 30M-GR	38585	1m = 2	1m = 29	green	65	30000	
GIVRO LED 30M-BL	38588	1m = 2	1m = 9,5	blue	65	30000	
GIVRO LED 50M-WW	38574	1m = 2	1m = 110	Warm white	65	50000	G
GIVRO LED 50M-NW	38577	1m = 2	1m = 120	white	65	50000	G
GIVRO LED 50M-CW	38580	1m = 2	1m = 120	cold white	65	50000	G
GIVRO LED 50M-RE	38583	1m = 2	1m = 6	red	65	50000	
GIVRO LED 50M-GR	38586	1m = 2	1m = 29	green	65	50000	
GIVRO LED 50M-BL	38589	1m = 2	1m = 9,5	blue	65	50000	

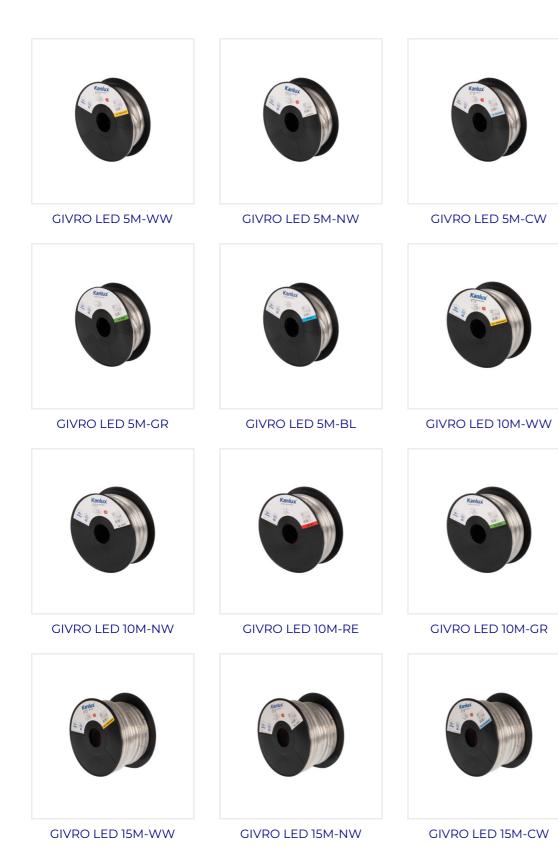



GIVRO LED 5M-RE



GIVRO LED 15M-GR GIVRO LED 15M-BL



GIVRO LED 30M-CW



GIVRO LED 30M-RE



GIVRO LED 30M-GR



GIVRO LED 30M-BL



GIVRO LED 50M-WW



GIVRO LED 50M-NW



GIVRO LED 50M-CW



GIVRO LED 50M-RE




GIVRO LED 50M-GR




GIVRO LED 50M-BL



GIVRO LED 5M-NW




GIVRO LED 5M-CW



GIVRO LED 5M-RE

GIVRO LED 5M-WW

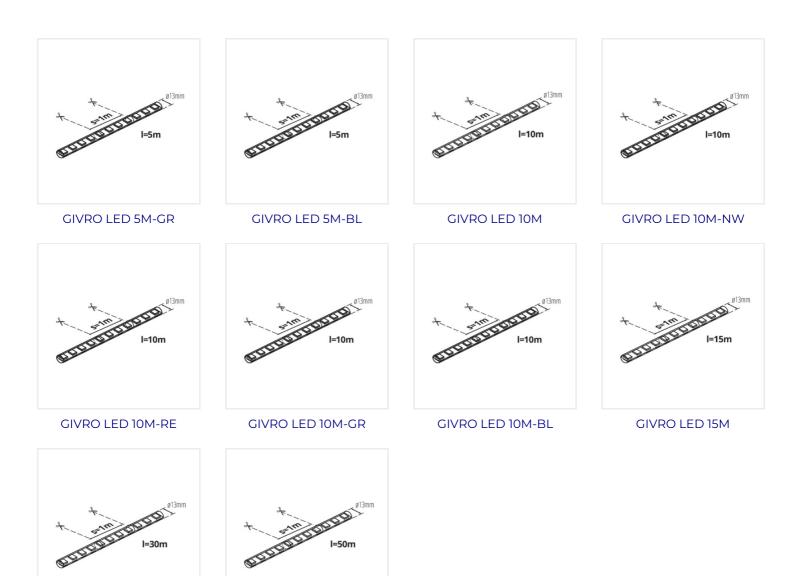

GIVRO LED 50M

GIVRO LED 30M

38590

GIVRO - PR SET

Connection cord for GIVRO LED rope lights, GIVRO - PR SET (38590).



38593

GIVRO-PR SET W/O PLUG Connection cord without the plug for GIVRO LED rope lights, GIVRO-PR SET W/O PLUG (38593).



38592

GIVRO - HOLDER

Bracket for GIVRO LED rope lights, GIVRO - HOLDER (38592).



38591

GIVRO - END CAP

End cap for GIVRO LED rope lights, GIVRO - END CAP (38591).



Date of issue: 24.09.2025, 09:00

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample. Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

