




[V] 220-240 AC	[Hz] 50	≥30000	[h] 50000	ellipse ≤ 6x Nachdam	Ra 80	SMD
DALI		IP 20		[°C] 5÷25		
[mm] 0,5÷2,5	m 0,5m	CE	UK CA			

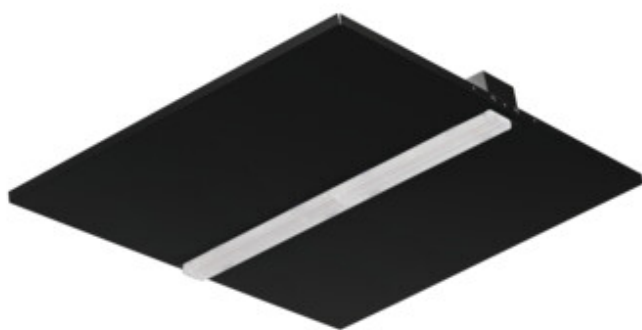

KND-S6D-NW-B-P1


		[W]	[lm]	Tc [K]	TYPE	[°]	
KND-S6D-NW-B-P1	37482	20	2650	4000	soczewka	60	czarna
KND-S6D-NW-W-P1	37470	20	3000	4000	soczewka	60	biała
KND-S6D-WW-B-P1	37476	20	2450	3000	soczewka	60	czarna
KND-S6D-WW-W-P1	37464	20	2800	3000	soczewka	60	biała
KND-S9D-NW-B-P1	37485	20	2600	4000	soczewka	90	czarna
KND-S9D-NW-W-P1	37473	20	2950	4000	soczewka	90	biała
KND-S9D-WW-B-P1	37479	20	2400	3000	soczewka	90	czarna
KND-S9D-WW-W-P1	37467	20	2750	3000	soczewka	90	biała




KND B P1



KND W P1



KND P1

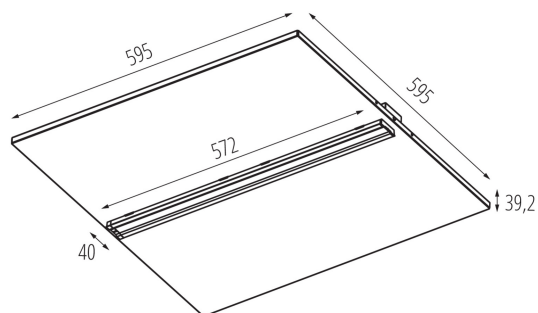

Létrehozás dátuma: 28.07.2025, 21:45

Fenntartjuk a műszaki változtatások bevezetésének jogát. A jelen anyagban található adatok jogi szempontból nem kötelező érvényűek.

Fotometria: adott termék vizsgálatakor elért eredmények.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

