



[V] 220-240 AC	[Hz] 50	≥30000	[h] 50000	ellipse ≤ 6x Nachdam	Ra 80	SMD
DALI		IP 20		°C 5÷25		
[mm] 0,5÷2,5	m 0,5m	CE	UK CA			



KND-L6D-NW-B-P3


		[W]	[lm]	Tc [K]	TYPE	[°]	
KND-L6D-NW-B-P3	37531	26	3850	4000	soczewka	60	czarna
KND-L6D-NW-W-P3	37519	26	4400	4000	soczewka	60	biała
KND-L6D-WW-B-P3	37525	26	3650	3000	soczewka	60	czarna
KND-L6D-WW-W-P3	37513	26	4150	3000	soczewka	60	biała
KND-L9D-NW-B-P3	37534	26	3750	4000	soczewka	90	czarna
KND-L9D-NW-W-P3	37522	25	4350	4000	soczewka	90	biała
KND-L9D-WW-B-P3	37528	26	3600	3000	soczewka	90	czarna
KND-L9D-WW-W-P3	37516	26	4050	3000	soczewka	90	biała




KND-B-P3



KND-W-P3



KND-P3

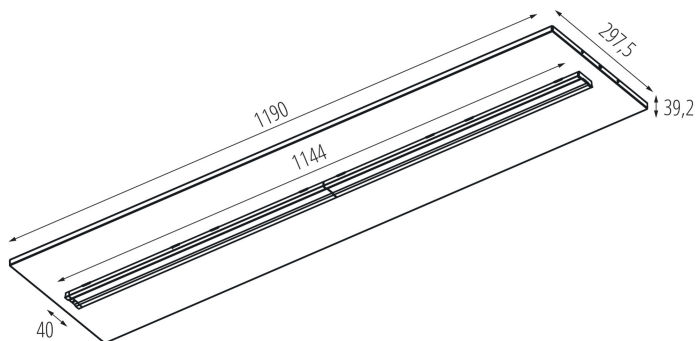

Létrehozás dátuma: 28.07.2025, 21:45

Fenntartjuk a műszaki változtatások bevezetésének jogát. A jelen anyagban található adatok jogi szempontból nem kötelező érvényűek.

Fotometria: adott termék vizsgálatakor elért eredmények.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

