



[V] 220-240 AC	[Hz] 50	≥ 30000	[h] 50000	ellipse $\leq 6x$ Nachdäm	Ra 80	SMD
DALI		IP 20		$5 \div 25$		
[mm²] 0,5÷2,5	0,5m	CE	UK CA			



KND-M6D-NW-B-P3




KND-M6D-NW-B-P3	37532	36	5250	4000	soczewka	60	fekete
KND-M6D-NW-W-P3	37520	36	6000	4000	soczewka	60	fehér
KND-M6D-WW-B-P3	37526	36	4950	3000	soczewka	60	fekete
KND-M6D-WW-W-P3	37514	36	5650	3000	soczewka	60	fehér
KND-M9D-NW-B-P3	37535	36	5100	4000	soczewka	90	fekete
KND-M9D-NW-W-P3	37523	35	5900	4000	soczewka	90	fehér
KND-M9D-WW-B-P3	37529	36	4900	3000	soczewka	90	fekete
KND-M9D-WW-W-P3	37517	36	5500	3000	soczewka	90	fehér




KND-B-P3



KND-W-P3



KND-P3

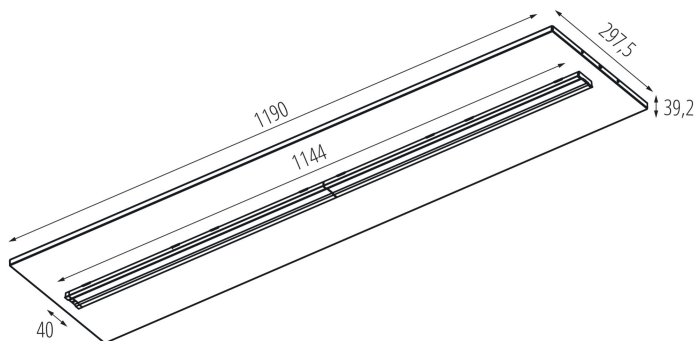

Létrehozás dátuma: 28.07.2025, 21:45

Fenntartjuk a műszaki változtatások bevezetésének jogát. A jelen anyagban található adatok jogi szempontból nem kötelező érvényűek.

Fotometria: adott termék vizsgálatakor elért eredmények.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

