

KSPD

Limitatore di sovratensione



KSPD-T2 275/40 1P

[V] Tipo di protezione

KSPD-T2 275/40 1P	36310	230 AC	1	T2 (C)
KSPD-T2 275/120 3P	36311	230 AC	3	T2 (C)
KSPD-T2 275/160 3P+N	36312	230 AC	4	T2 (C)
KSPD-TIT2 275/50 1P	36313	230 AC	1	T1+T2 (B+C)
KSPD-TIT2 275/100 1PN	36314	230 AC	2	T1+T2 (B+C)
KSPD-TIT2 275/150 3P	36315	230 AC	3	T1+T2 (B+C)
KSPD-TIT2 275/200 3PN	36316	230 AC	4	T1+T2 (B+C)
KSPD-TT 275/160 3P+N	36317	230 AC	4	T2 (C)

Il limitatore di sovratensione 1 + 2 (T1 + T2 / B + C): viene utilizzato per proteggere le installazioni di alimentazione NN contro gli effetti delle sovratensioni derivanti durante i fulmini, così come le sovratensioni indotte o di collegamento / destinate all'installazione in reti TN / TT Conformità con lo standard: EN61643-1, EN61643-11. I limitatori di sovratensione (KSPD) tipo KSD-T1 + T2 sono fatti secondo EN61643-1, EN61643-11. Questi scaricatori di sovratensione tipo 1 + 2 sono stati costruiti per proteggere le installazioni a bassa tensione da fulmini, diretti e indiretti. I limitatori forniscono protezione all'interno della zona 0A-1 secondo EN62305.

KSPD

Limitatore di sovratensione



KSPD-T2 275/40 1P



KSPD-T2 275/120 3P



KSPD-T2 275/160 3P+N



KSPD-TIT2 275/50 1P



KSPD-TIT2 275/100 1PN




KSPD-TIT2 275/150 3P




KSPD-TIT2 275/200 3PN




KSPD-TT 275/160 3P+N




KSPD-T2 275/40 1P



KSPD-T2 275/120 3P




KSPD-T2 275/160 3P+N



KSPD-TIT2 275/50 1P

KSPD

Limitatore di sovratensione

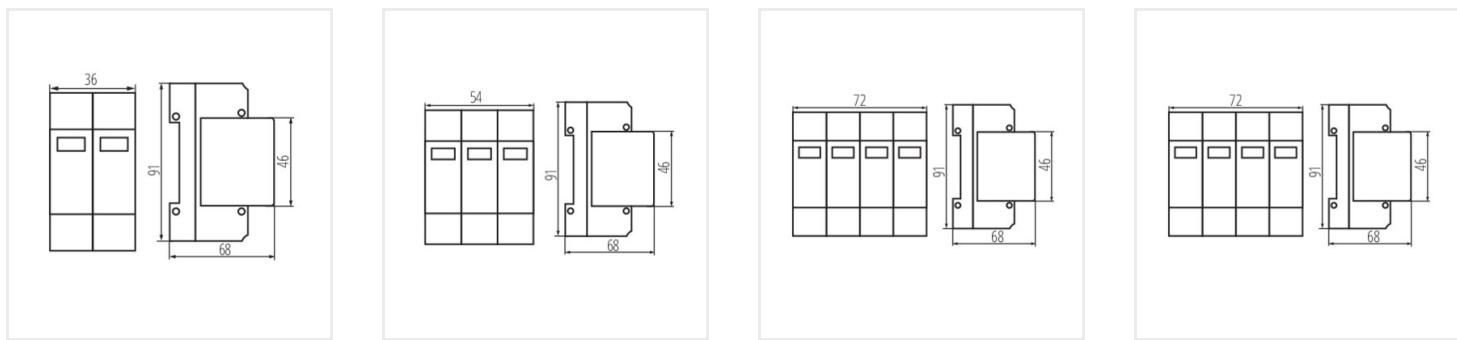

KSPD-TIT2 275/100 1PN

KSPD-TIT2 275/150 3P

KSPD-TIT2 275/200 3PN

KSPD-TT 275/160 3P+N