


## KIENO LED P1

Plafoniera LED per ufficio ad incasso



[V] 220-240 AC	[Hz] 50	[s] ≥30000	[h] 50000	[+/-] ellipse ≤ 6x MacAdam	[Ra] 80	[SMD]
[ $\Omega$ ] 1,5÷2,5	[ $\oplus$ ] 0,5m	[IP] 20	[ $\square$ ]	[ $\star$ ] 5÷25	[ $\star$ ] 80	[ $\star$ ]
[ $\text{mm}^2$ ] 1,5÷2,5	[ $\text{m}$ ] 0,5m	[CE]	[UKCA]			

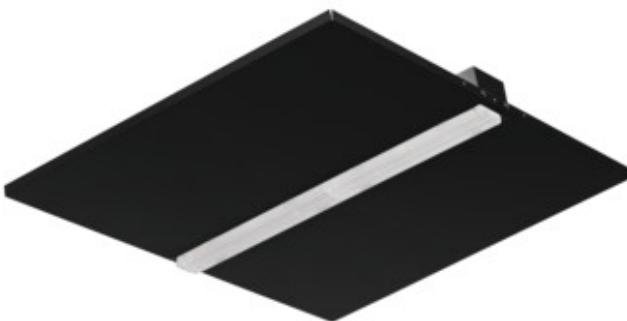

KN-B-P1



KN-L6D-NW-B-P1	<b>37459</b>	25	3600	4000	soczewka	60	nero
KN-L6D-NW-W-P1	<b>37447</b>	25	4100	4000	soczewka	60	bianco
KN-L6D-WW-B-P1	<b>37453</b>	25	3350	3000	soczewka	60	nero
KN-L6D-WW-W-P1	<b>37441</b>	25	3850	3000	soczewka	60	bianco
KN-L9D-NW-B-P1	<b>37462</b>	25	3550	4000	soczewka	90	nero
KN-L9D-NW-W-P1	<b>37450</b>	25	4050	4000	soczewka	90	bianco
KN-L9D-WW-B-P1	<b>37456</b>	25	3350	3000	soczewka	90	nero
KN-L9D-WW-W-P1	<b>37444</b>	25	3800	3000	soczewka	90	bianco

- Materiale del corpo: metallo
- Diffusore: plastica

## KIENO LED P1


Plafoniera LED per ufficio ad incasso



KN-B-P1



KN-W-P1



KN-P1

