

## TONIL II LED

Oprawa ścienna LED




[V] 220-240 AC	[Hz] 50	[lm] 145	[°] 30	[h] ≥15000	[h] 20000	Tc [K] 3000
Ellipse ≤ 6x MacAdam	Ra 80	SMD	[°]	[°]	IP 20	
[°C] 5÷25		[°] 360	[°] 360		[mm²] 0,5-1,5	0,2m
	lm W 44		CE	EAC	UK CA	

TONIL II LED B



TONIL II LED B	<b>32522</b>	3,3	czarny
TONIL II LED W	<b>32523</b>	3,3	biały

- Materiał obudowy: stop aluminium
- Materiał klosza: tworzywo sztuczne

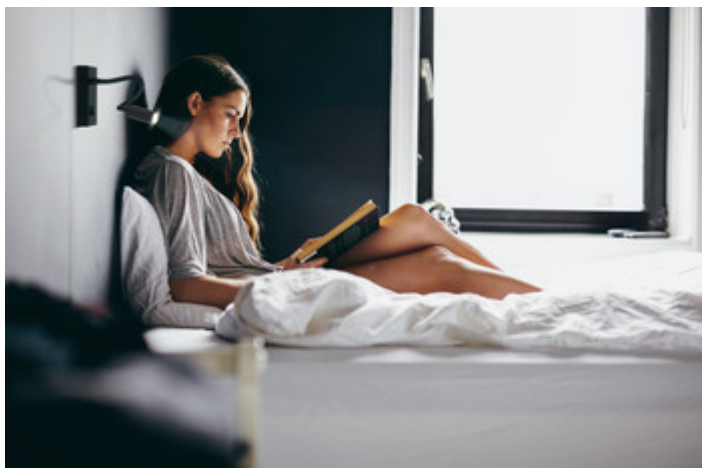


## TONIL II LED

---


### Oprawa ścienna LED



TONIL II LED B



TONIL II LED W



TONIL II LED