


Kanlux




Kanlux STONO TRK

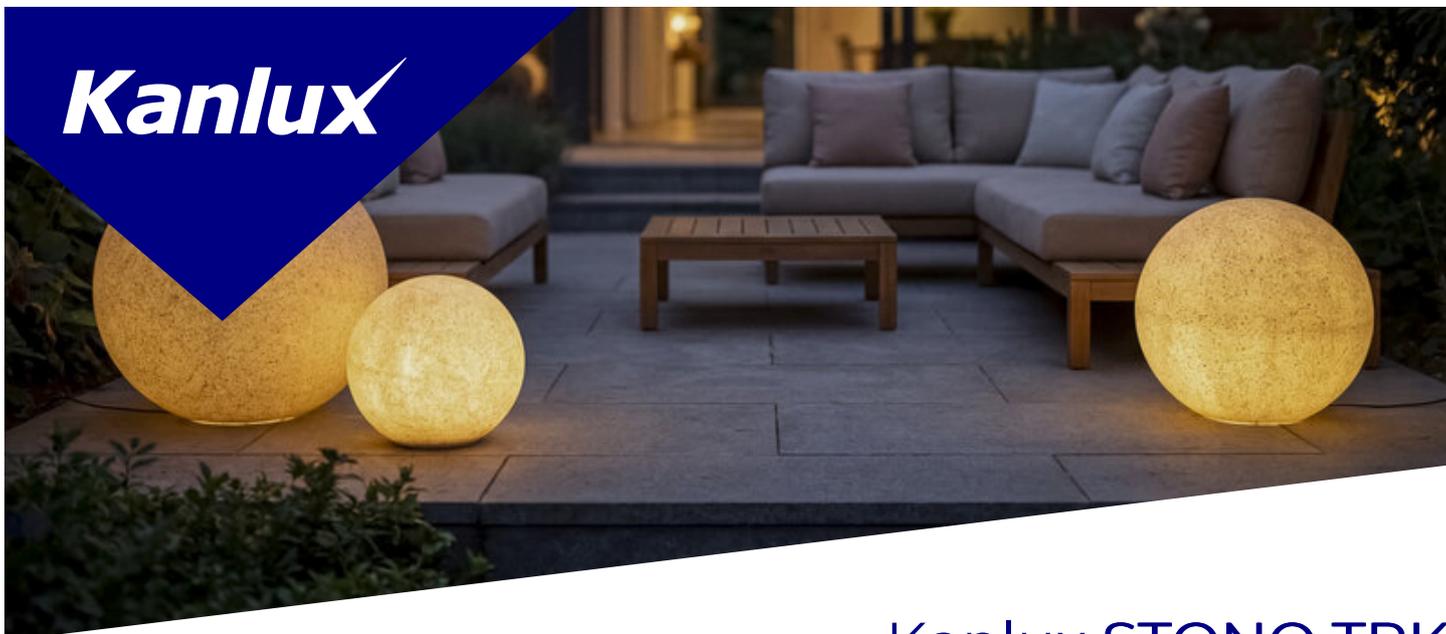

IP
65

[V] 220-240 AC	[Hz] 50			E27		IP 65
	 -20÷35			[m] 3	[mm] 1	 0,2m
CE	EAC	UK CA				



STONO 20 TRK



Диаметр [мм]



Model	Code	max	Диаметр [мм]	Material
STONO 20 TRK	45934	max 15	200	терракота
STONO 30 TRK	45935	max 20	300	терракота
STONO 40 TRK	45936	max 20	400	терракота
STONO 50 TRK	45937	max 20	500	терракота



STONO 20 TRK




STONO 30 TRK




STONO 40 TRK




STONO 50 TRK




STONO 20 TRK



STONO 30 TRK



STONO 40 TRK



STONO 50 TRK

Date of issue: 18.03.2026, 14:30

Мы оставляем за собой право на внесение технических изменений. Данные, содержащиеся в этом материале, не имеют юридически обязательной силы.

Фотометрия: результаты, полученные при тестировании конкретного экземпляра.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

