




[V] 220-240 AC	[Hz] 50	≥ 30000	[h] 50000	ellipse $\leq 6x$ MacAdam	Ra 80	SMD
DALI		IP 20		$5 \div 25$		
[mm] 0,5÷2,5	m 0,5m					



KND-M6D-NW-B-P1

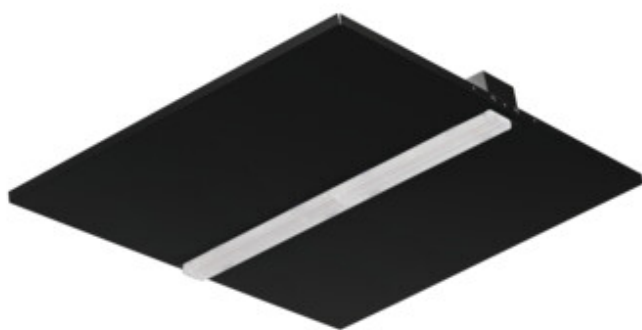


KND-M6D-NW-B-P1	37484	38	4750	4000	soczewka	60	čierna
KND-M6D-NW-W-P1	37472	38	5450	4000	soczewka	60	biela
KND-M6D-WW-B-P1	37478	38	4450	3000	soczewka	60	čierna
KND-M6D-WW-W-P1	37466	38	5100	3000	soczewka	60	biela
KND-M9D-NW-B-P1	37487	38	4700	4000	soczewka	90	čierna
KND-M9D-NW-W-P1	37475	38	5350	4000	soczewka	90	biela
KND-M9D-WW-B-P1	37481	38	4350	3000	soczewka	90	čierna
KND-M9D-WW-W-P1	37469	38	5000	3000	soczewka	90	biela




KND B P1



KND W P1



KND P1

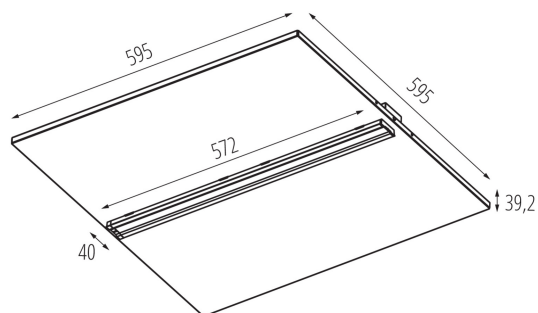

Vytvorený dokument: 01.10.2025, 06:21

Zmena technických parametrov vyhradená. Údaje, ktoré sú uvedené v tomto materiáli, nie sú právne záväzné.

Fotometria: výsledky získané pri testovaní konkrétneho exemplára.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

