



[V] 220-240 AC	[Hz] 50	≥ 30000	[h] 50000	ellipse $\leq 6x$ MacAdam	Ra 80	SMD
DALI		IP 20		$^{\circ}\text{C}$ 5÷25		
[mm²] 0,5÷2,5	m 0,5m	CE	UK CA			




KNDU-S6D-NW-B-P1D	37557	19	2750	4000	soczewka	60	čierna
KNDU-S6D-NW-W-P1D	37551	19	3150	4000	soczewka	60	biela
KNDU-S6D-WW-B-P1D	37554	19	2600	3000	soczewka	60	čierna
KNDU-S6D-WW-W-P1D	37548	19	2950	3000	soczewka	60	biela




KNDU-B-P1D



KNDU-W-P1D



KNDU-P1D

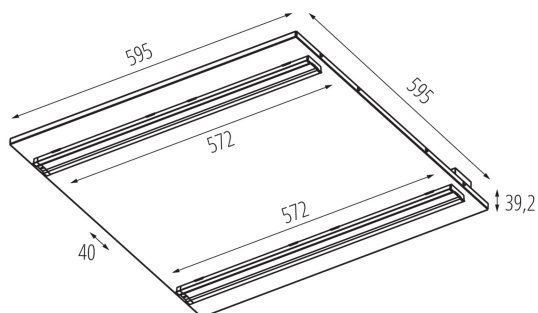

Vytvorený dokument: 01.10.2025, 06:25

Zmena technických parametrov vyhradená. Údaje, ktoré sú uvedené v tomto materiáli, nie sú právne záväzné.

Fotometria: výsledky získané pri testovaní konkrétneho exemplára.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

