

MODERN  
design

EASY  
installation

MADE IN  
POLAND

HIGH  
efficacy

BRANDED  
components

DALI  
system

low  
UGR

|                                                                                                 |                                                                                           |                                                                                                 |                                                                                                 |                                                                                                     |                                                                                           |                                                                                            |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| <br>220-240 AC | <br>50   | <br>≥30000   | <br>50000    | <br>≤ 6x Mackdam | <br>80 | <br>SMD |
| <br>DALI       |          | <br>IP<br>20 |              | <br>5÷25         |        |         |
| <br>0,5÷2,5    | <br>0,5m | <br>CE       | <br>UK<br>CA |                                                                                                     |                                                                                           |                                                                                            |



KNDU-M6D-NW-B-P1D




|                   |              |    |      |      |          |    |        |
|-------------------|--------------|----|------|------|----------|----|--------|
| KNDU-M6D-NW-B-P1D | <b>37559</b> | 36 | 5250 | 4000 | soczewka | 60 | čierna |
| KNDU-M6D-NW-W-P1D | <b>37553</b> | 36 | 6000 | 4000 | soczewka | 60 | biela  |
| KNDU-M6D-WW-B-P1D | <b>37556</b> | 36 | 4950 | 3000 | soczewka | 60 | čierna |
| KNDU-M6D-WW-W-P1D | <b>37550</b> | 36 | 5650 | 3000 | soczewka | 60 | biela  |




KNDU-B-P1D



KNDU-W-P1D



KNDU-P1D

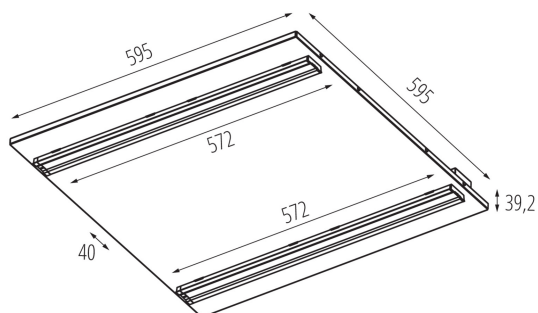

Vytvorený dokument: 01.10.2025, 06:25

Zmena technických parametrov vyhradená. Údaje, ktoré sú uvedené v tomto materiáli, nie sú právne záväzné.

Fotometria: výsledky získané pri testovaní konkrétneho exemplára.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland [kanlux@kanlux.com](mailto:kanlux@kanlux.com)

