

Kanlux

Kanlux ALIN IP55 LED



[V] 220-240 AC	[Hz] 50	[h] ≥30000	[h] 50000	ellipse ≤3x MacAdam	Ra 80	SMD
		IP 55		[°C] -20÷35		
[mm²] 0,5÷1	m 0,5m	CE	EAC	UK CA		



AL55-MH-NW-MAT-W-NT

		[°]	[lm]	Tc [K]	TYPE	[°]	
AL55-MH-NW-MAT-W-NT	38861	39,952	5300	4000	matné	X85/Y95	biela
AL55-MH-WW-MAT-W-NT	38971	39,952	5050	3000	matné	X85/Y95	biela
AL55-MH-NW-MAT-B-NT	38974	39,952	5300	4000	matné	X85/Y95	čierna
AL55-MH-WW-MAT-B-NT	38977	39,952	5050	3000	matné	X85/Y95	čierna
AL55-MH-NW-MPR-B-NT	39986	40	4900	4000	mikroprizmatický	X96/Y97	čierna



AL55-MH-NW-MAT-W-NT




AL55-MH-WW-MAT-W-NT



AL55-MH-NW-MAT-B-NT



AL55-MH-WW-MAT-B-NT

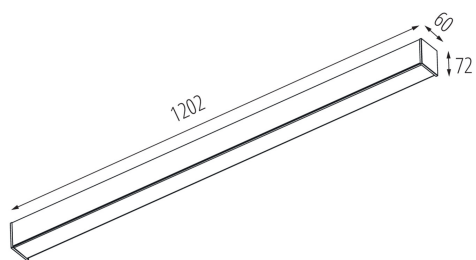

Vytvorený dokument: 01.10.2025, 14:20

Zmena technických parametrov vyhradená. Údaje, ktoré sú uvedené v tomto materiáli, nie sú právne záväzné.

Fotometria: výsledky získané pri testovaní konkrétneho exemplára.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

